
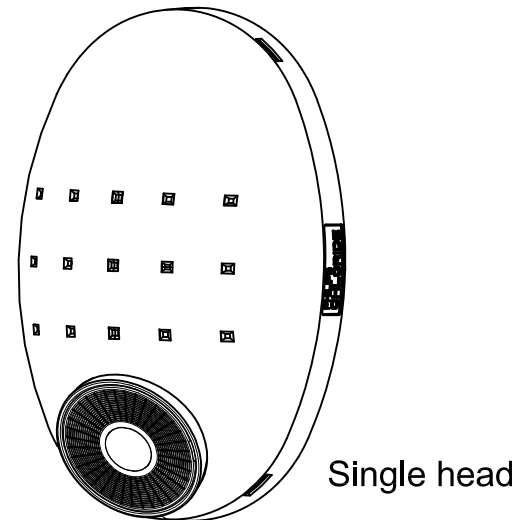


CLR INSTRUCTIONS SHEET

CHLORIDE

by signify

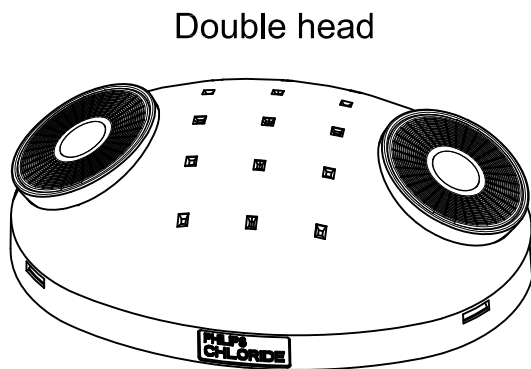

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Maximum mounting height is 10 feet. For installations greater than 10 feet, consult factory to ensure that adequate illumination will be available on the path of egress.
- All servicing should be performed by qualified personnel only.
- Do not use this equipment outdoors.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not let power supply cords touch hot surfaces.
- Do not mount near gas or electric heaters.
- CAUTION: To avoid electrical overload, total connected lamp load (factory and field installed) should not exceed output rating of equipment powering these heads.
- Do not use this equipment for other than intended use.

SAVE THESE INSTRUCTIONS

GENERAL INSTRUCTIONS

Mounting Instructions

Wall Mount or Ceiling Mount-Back Power Feed (see Fig 2 or 4)

1. Insert a flat blade screwdriver into the two slots and pry to remove the front cover from the back plate (see Fig 1).
2. Remove center knockout and appropriate keyhole knockouts in back plate and mount back plate to J-box.
3. Feed DC supply wires through center hole in the back plate.
4. Connect the remote head wires to the DC supply wires using the wire nuts provided. Yellow is positive(+), purple is negative(-). Press the wires back into the J-box.
5. Snap the front cover onto the back plate.
6. Adjust the lamp heads as required. (see Fig 5).

Wall Mount (Conduit Power Feed) (see Fig 3)


1. Insert a flat blade screwdriver into the two slots and pry to remove the front cover from the back plate (see Fig 1).
2. Remove knockout on the top flange of the back plate and the horseshoe shaped knockout from the top of the housing.
3. Secure conduit (or surface raceway) to top flange knockout of backplate and feed DC supply wires.
4. Remove keyhole knockouts from back plate and mount to the wall.
5. Refer to above 4 - 6 steps in Wall Mount-Back Power Feed.

Wiring Diagram

For use with Philips Chloride Compaq LED products only

Yellow Wire
Positive (+)

Purple Wire
Negative (-)



Open fixture

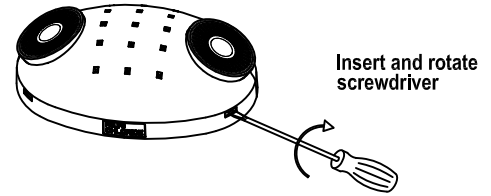


Fig 1

Wall mount-Back Power Feed

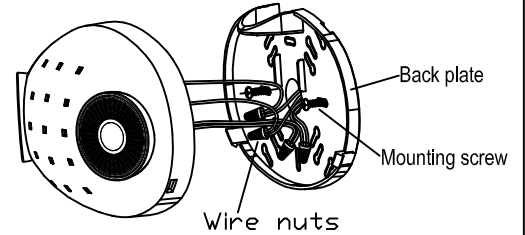


Fig 2

Wall mount - Conduit Power Feed

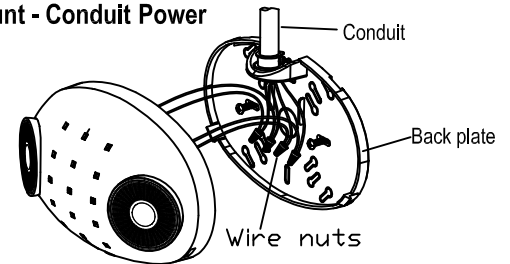


Fig 3

Ceiling mount-Top Power Feed

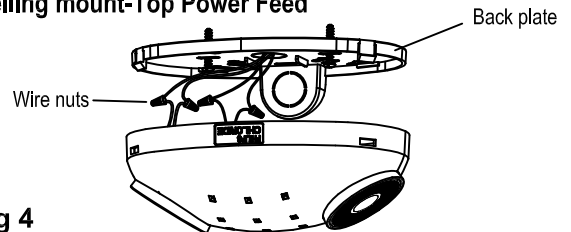


Fig 4

Lamp head adjust

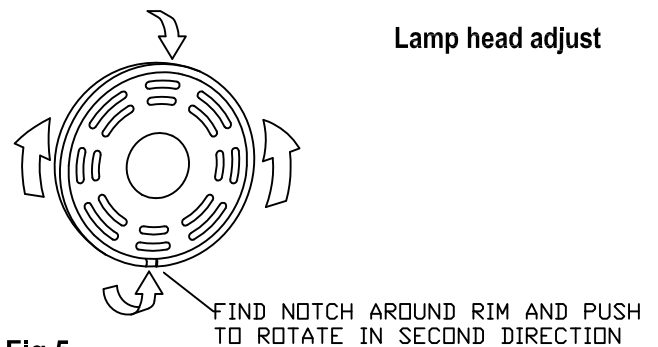


Fig 5