


NatureConnect

by @signify

Commissioning guide


NatureConnect link & Interact PRO

September, 2024

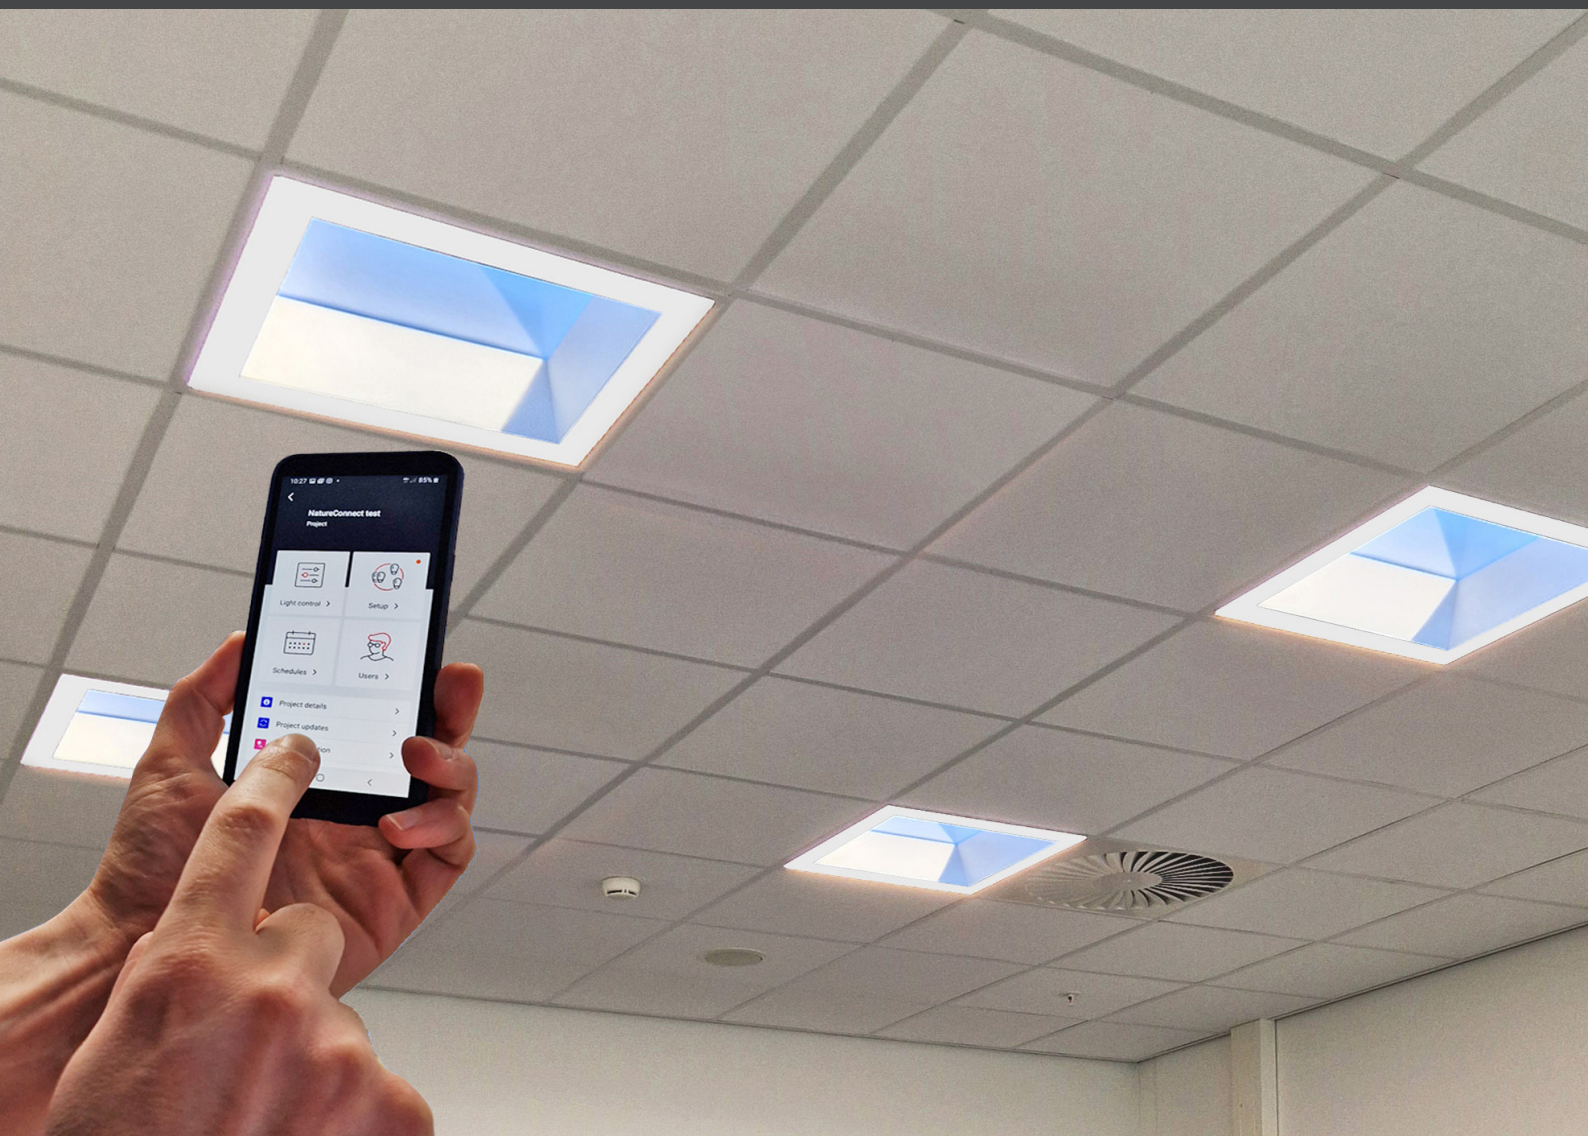

Introduction

The NatureConnect system is based on biophilic design principles, which uses elements of nature and natural analogues in indoor spaces to make people feel happy and healthy. Unlike traditional lighting which focuses on visual benefits, NatureConnect additionally brings the biological and emotional benefits of lighting. It reconnects us with the constant cycles and variations of nature for comfortable, engaging and attractive indoor environments.

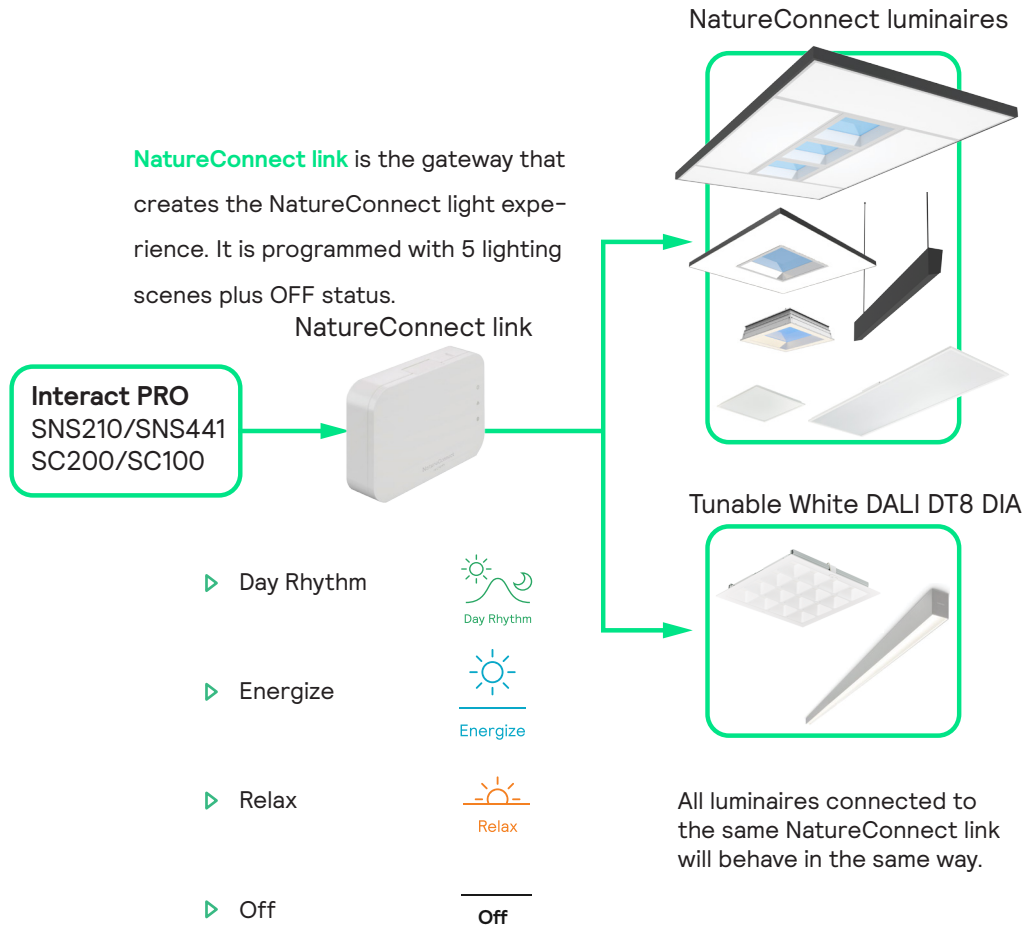

The best NatureConnect experience is achieved combining NatureConnect link with presence sensors and user interfaces.

NatureConnect switch



Interact switch with NatureConnect icons (910505103545)

- ▶ Wireless, battery free
- ▶ Scene and Off buttons with icons and text for ease of use
- ▶ High quality engraving for long durability

Presence sensors

helps to reduce the power consumption. They can be programmed in a way that when no occupancy is detected, inside the room, they send the signal to the NatureConnect link to turn off the luminaires. When presence is detected it goes automatically to “Day Rhythm”.

Commissioning


You will need a device that supports Interact commissioning app. (e.g. smartphone or a tablet) with Bluetooth technology.

For more info check:


<https://sme.interact-lighting.com/web/help/prf-pra/2.3/install/commissioning.html>




Test the connection with the luminaires by pressing the service button



① Press the "service" button to start the test

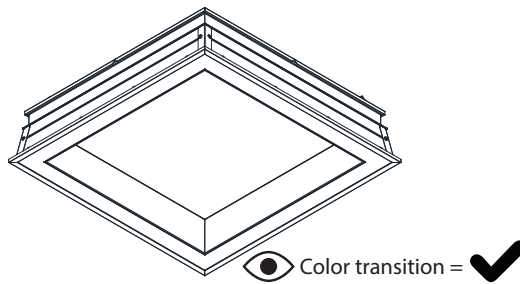

② Check luminaires



③ Press the "service" button to finish the test

Commissioning with interact PRO as Lighting Control System

1 Download the **interact** office app and create an account

Download the Interact Pro app



GET IT ON Google Play

Download on the App Store



interact

Log in to Interact Pro

Email address

Password 

[Forgot password](#)

Get started




By proceeding you agree with the [Terms of usage](#)

Are you an installer company and not yet registered?

Request access





2 Create and structure a new project

Create a project





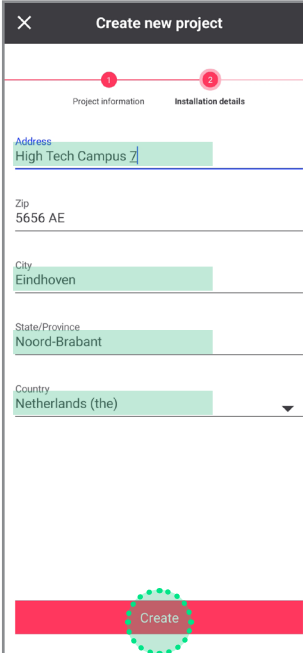
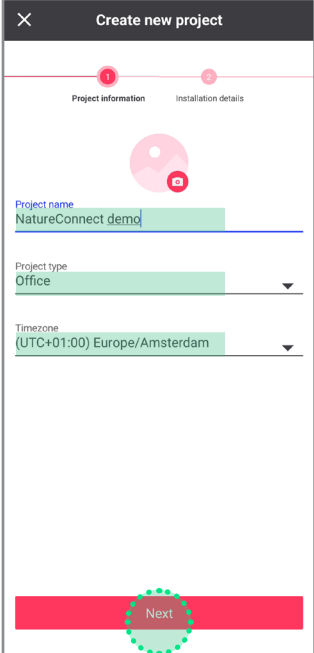
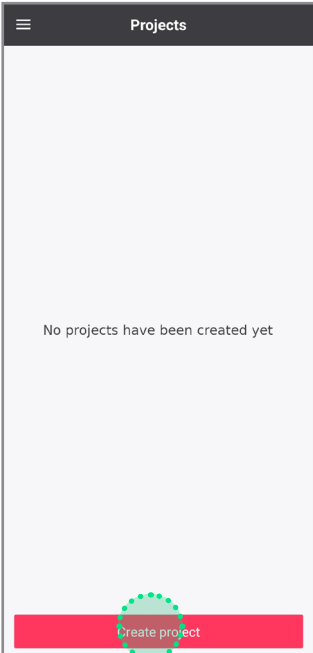


Fill in the fields and open the new project just created.

Create a Light Network

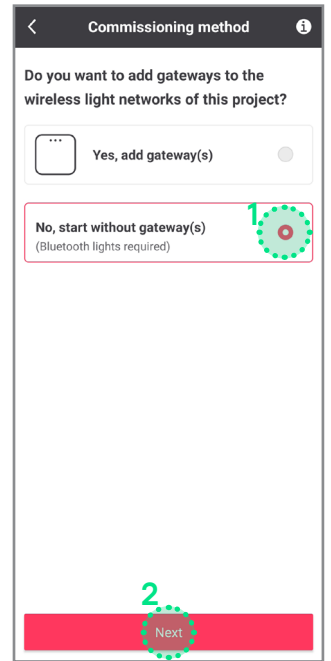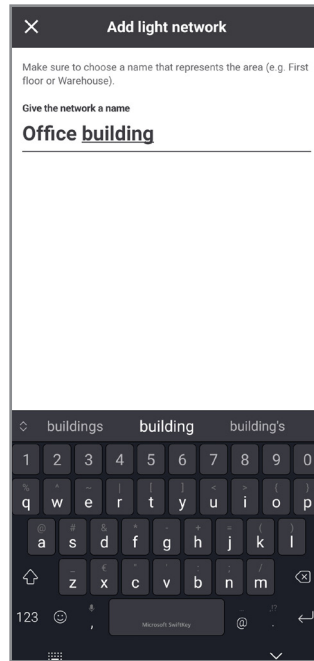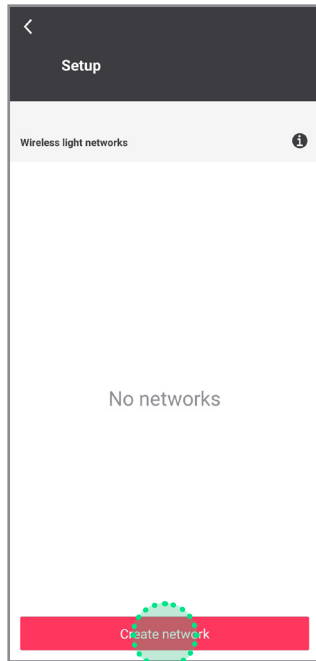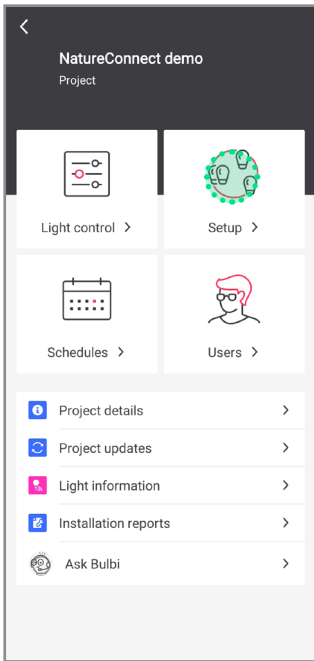

Add a group

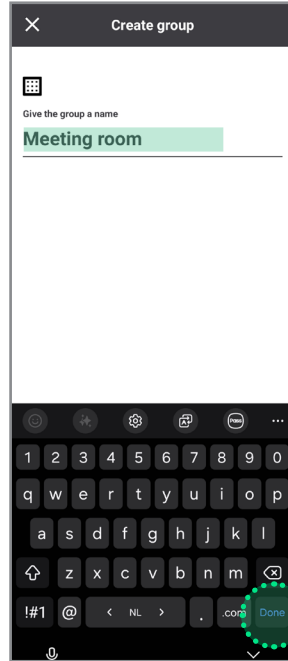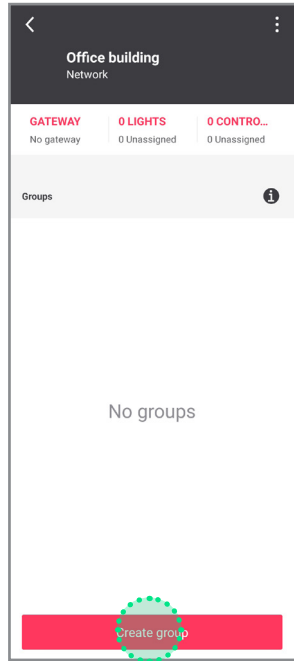
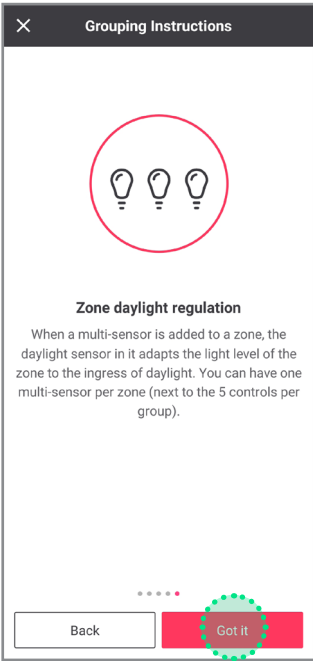
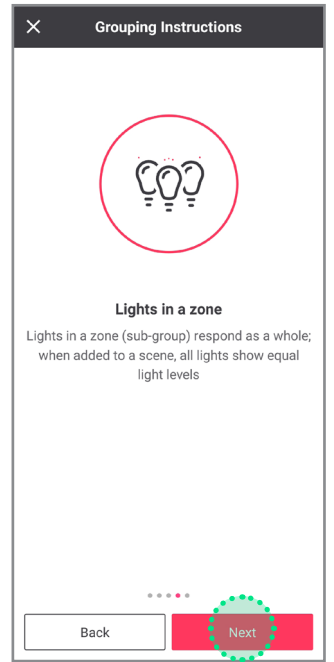
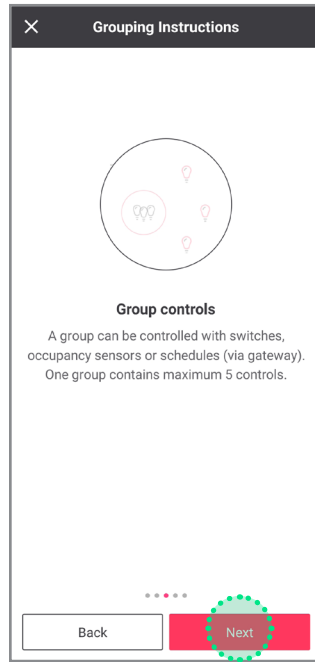
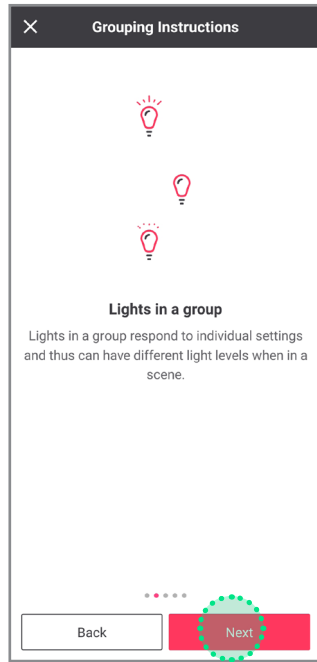
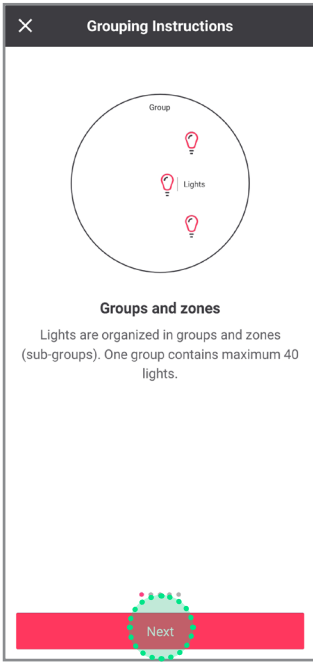


3 Find and assign one or more NatureConnect link that belong to the same group.

Stand close (2 m ca.) to the sensorv connected to the NatureConnect link. (Bluetooth must be active on your device.)

Tab **Lights**: click on **Add lights**






It will be found as e.g.: **Philips luminaire - ****** or **NatureConnect link - ******.

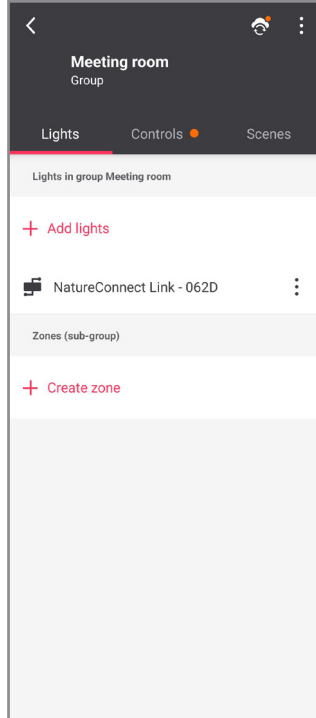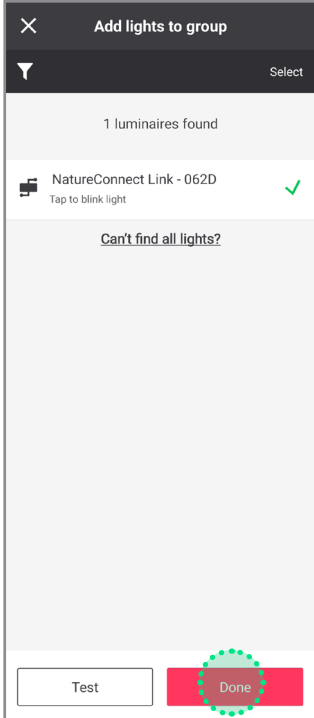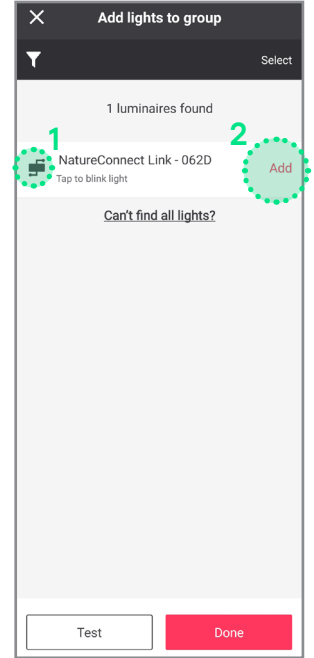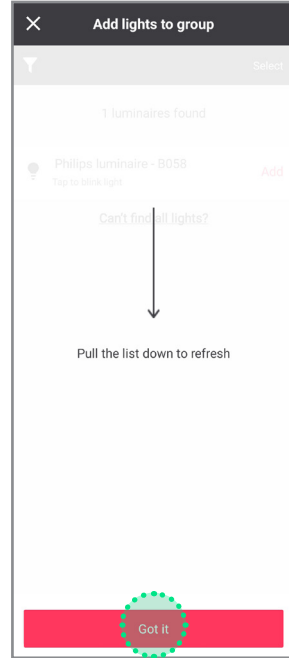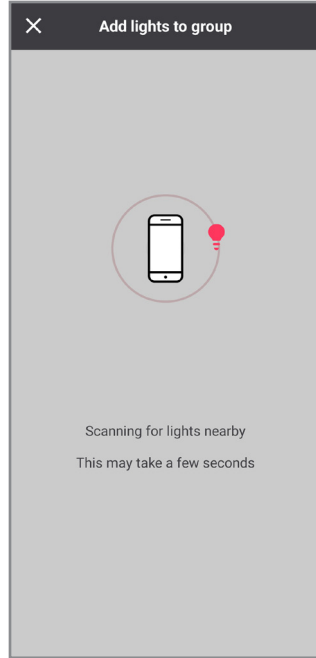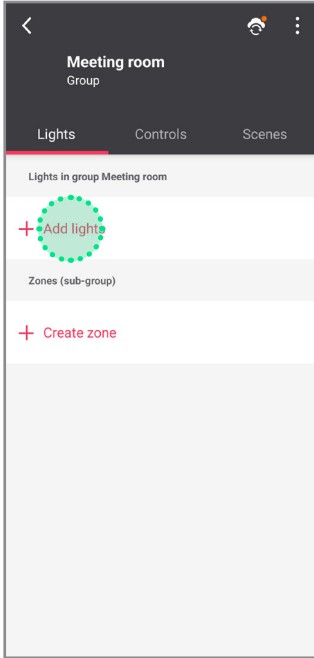


1 Click the left icon to identify the discovered NatureConnect lin and to blink the connected luminaire(s).

2 Click the add button for each NatureConnect link you would like to add to the same group.








Tab Controls

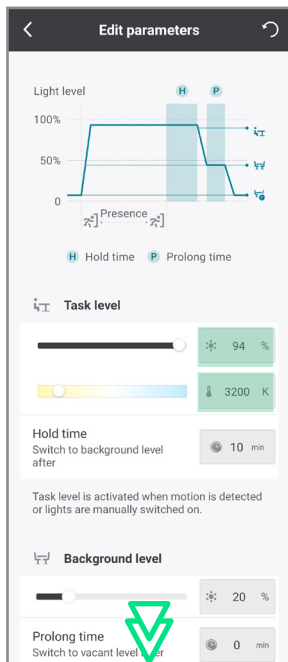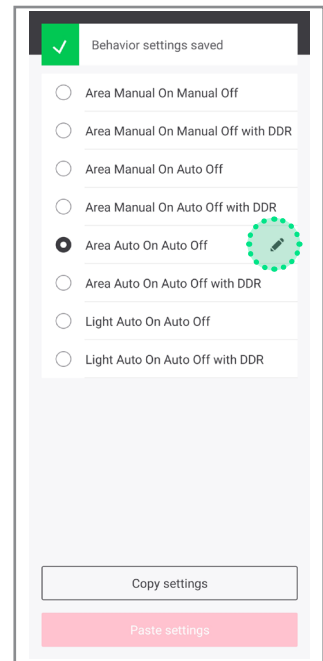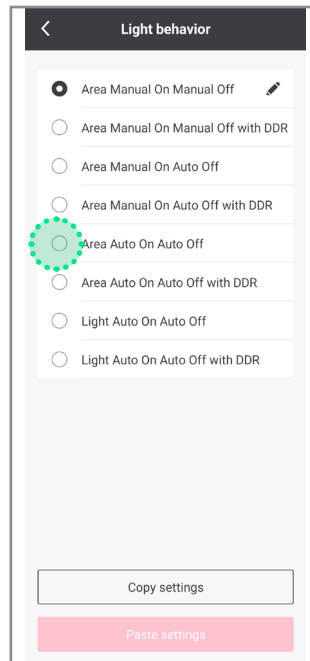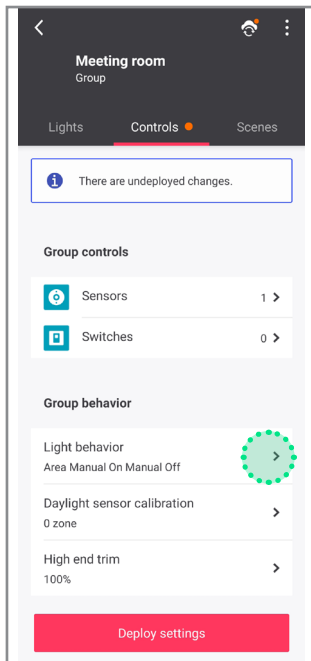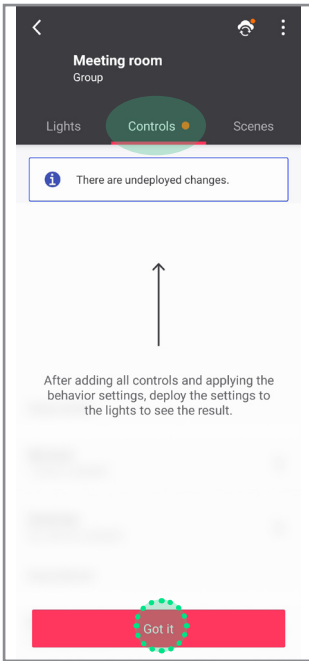

Set brightness to 94%
Set CCT to 3200 K



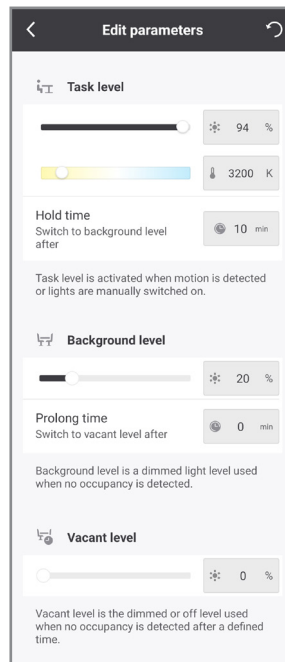


Optional: how to add battery power motion sensor

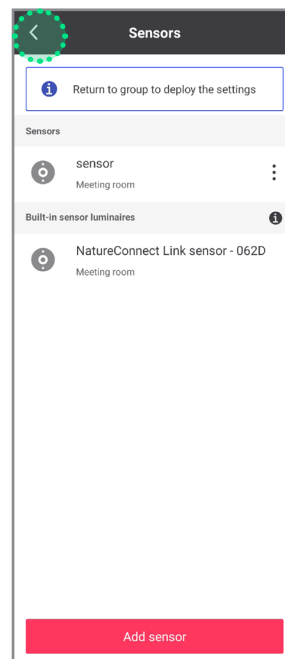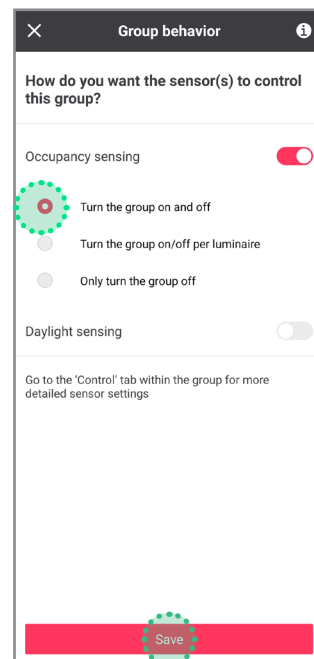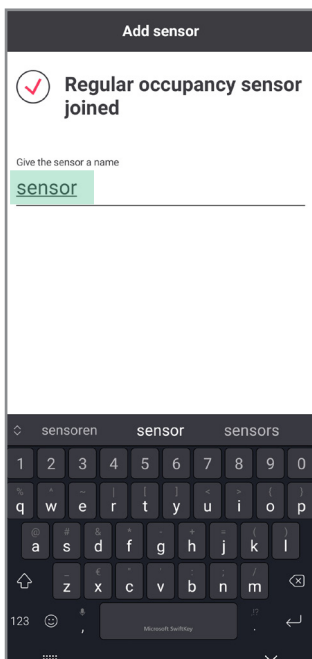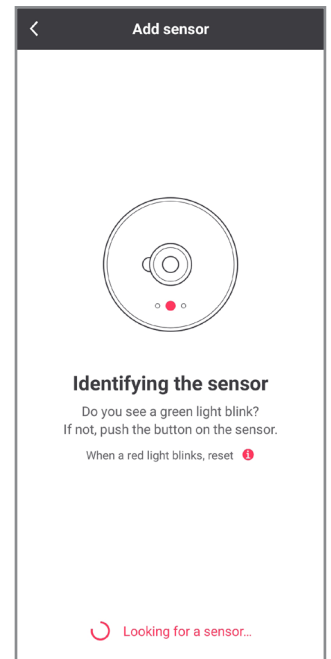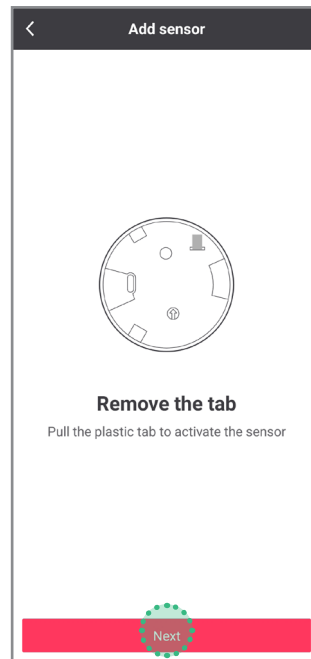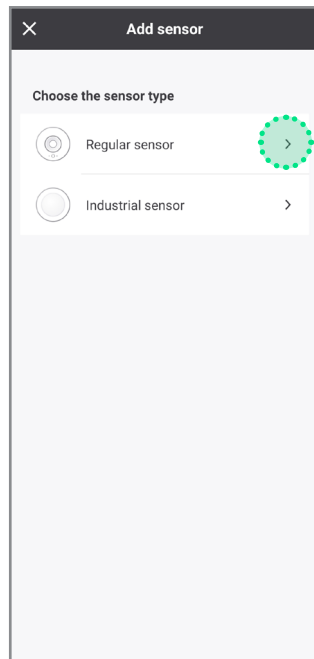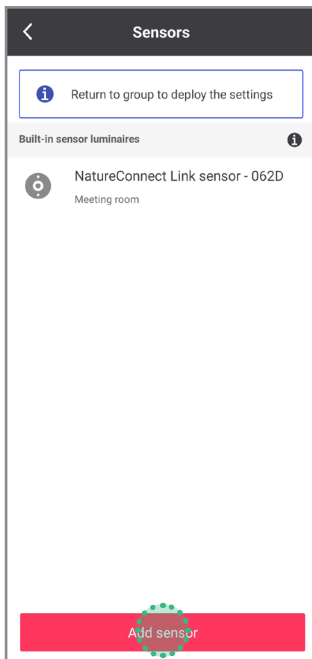


5

Configure the system without motion sensors

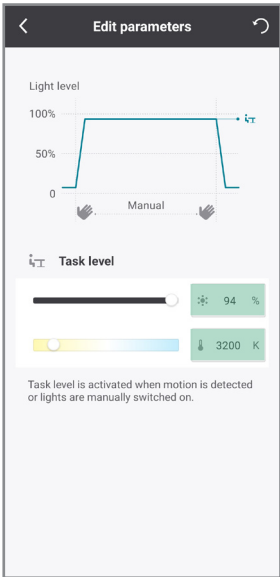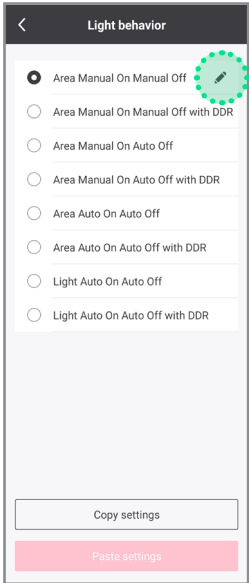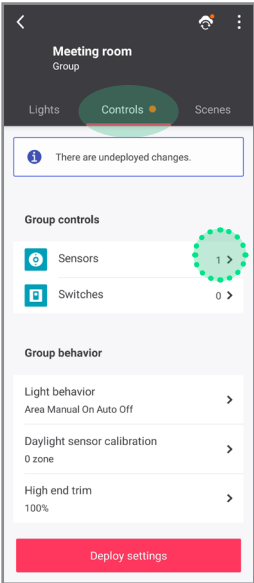


Set brightness to 94%
Set CCT to 3200 K

 If you are not using any user interface, skip to step 8.




6

Add one or more user interfaces






When more than one switch is used, all switches will behave in the same way.


Tab **Controls**: click on **Switches**

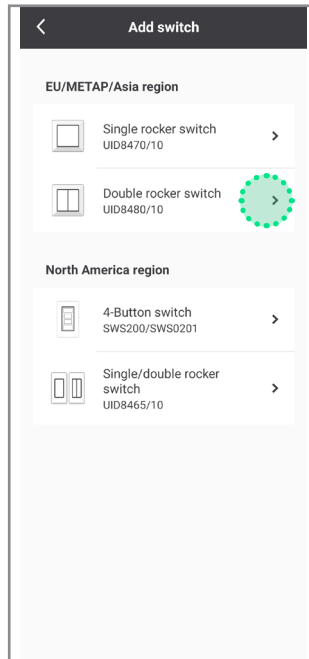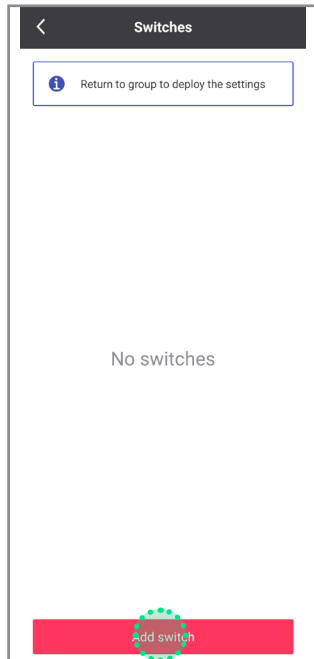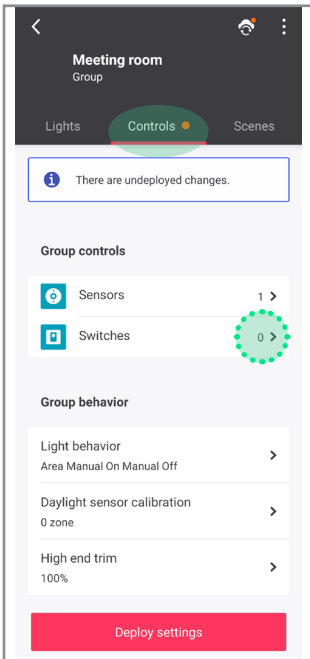



Identify the switch following the instructions

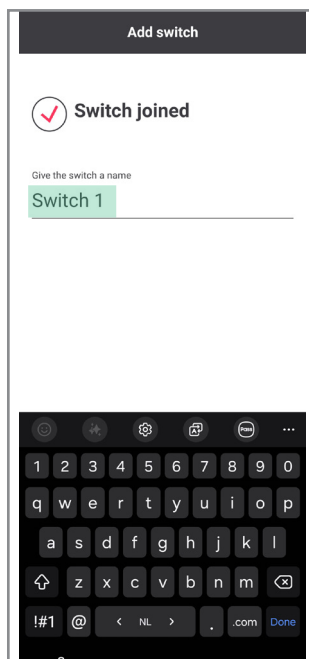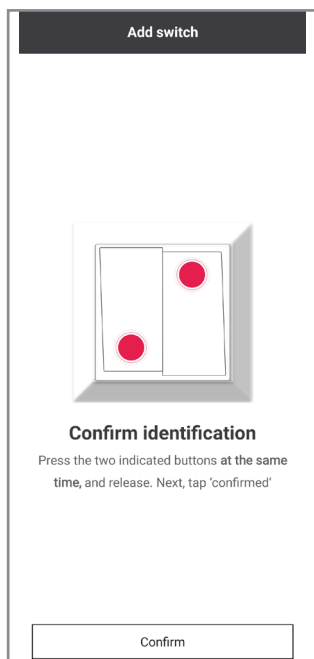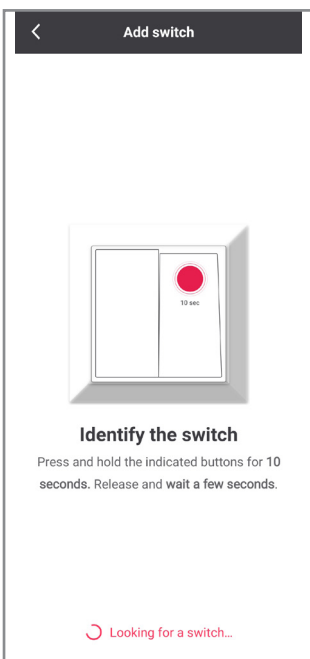


Test if the switch is added by clicking ON/OFF button



Lights turned off? If yes

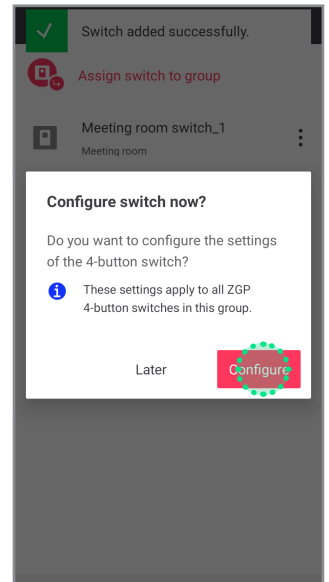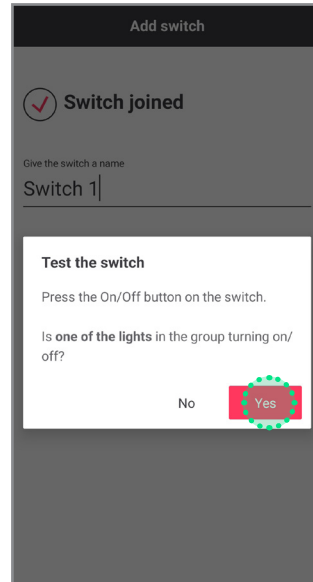


In case luminaires in the group do not turn off, follow below steps

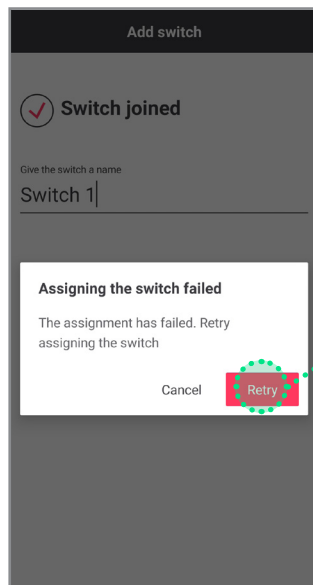

Retry will restart the add switch flow from the beginning.


7 Configure the four button switch

Configure the TOP LEFT button as the ENERGIZE scene

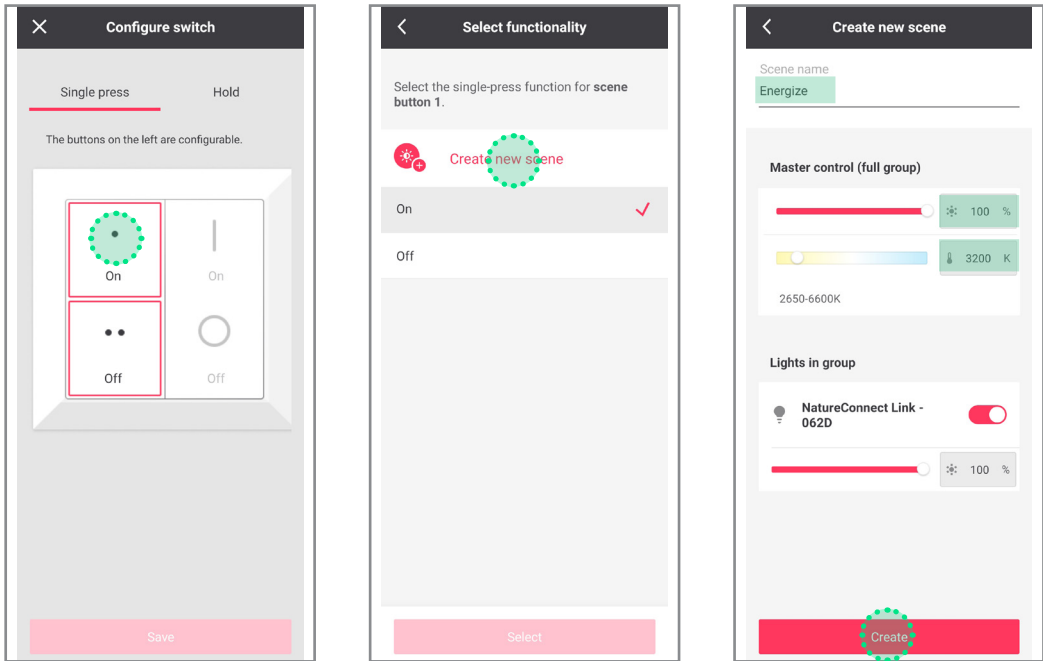


Set brightness to 100%
Set CCT to 3200 K

Configure the BOTTOM LEFT button as the RELAX scene

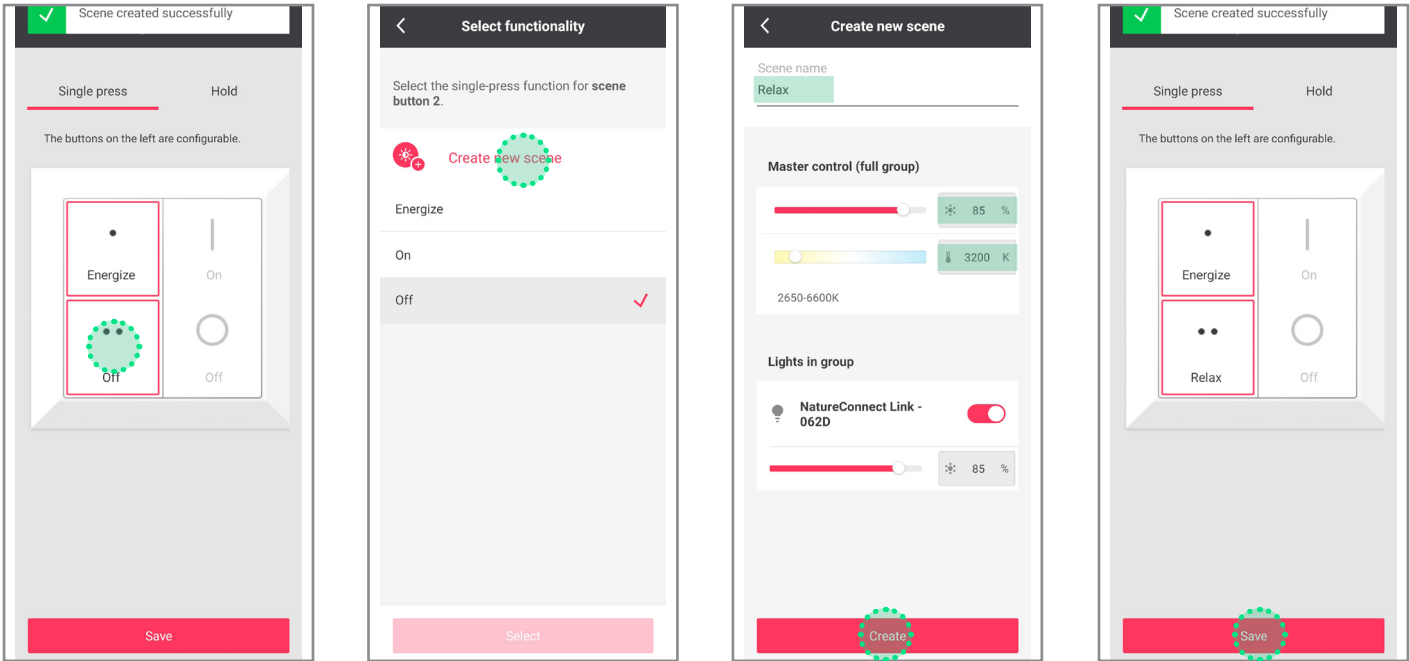


Set brightness to 85%
Set CCT to 3200 K

Deploy

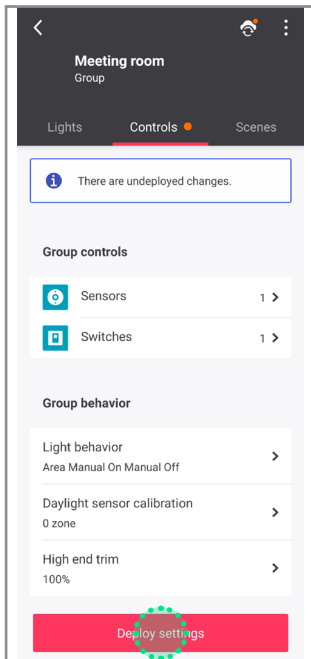


Sync

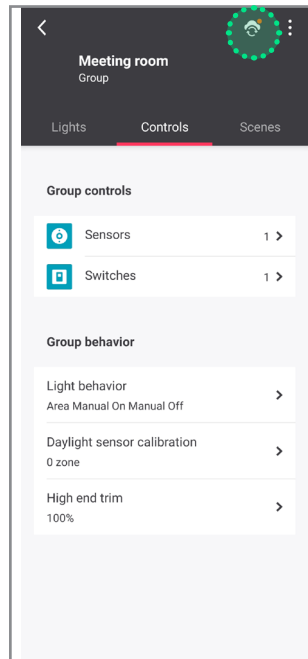


Additional scenes (optional)

DEMO MODE

It is possible to program a scene that runs in cycle a faster mode of the dynamic scenes. Suitable for demo purposes controlled through the commissioning app.

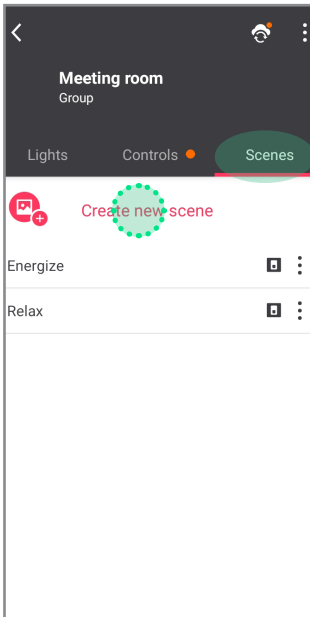


DEMO DAY RHYTHM

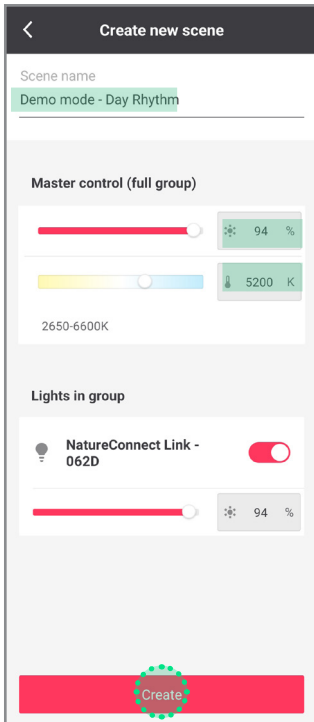


Set brightness to 94%
Set CCT to 5200 K

DEMO ENERGIZE

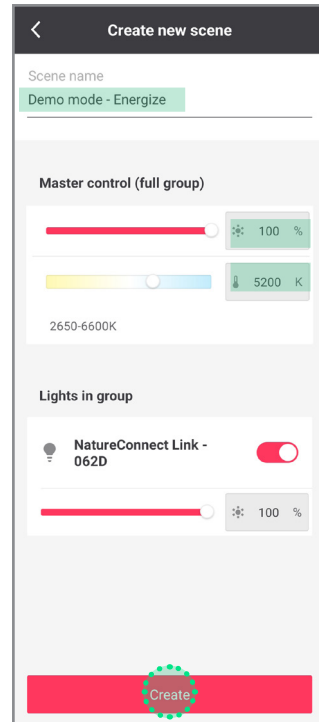

Set brightness to 100%
Set CCT to 5200 K

DEMO RELAX

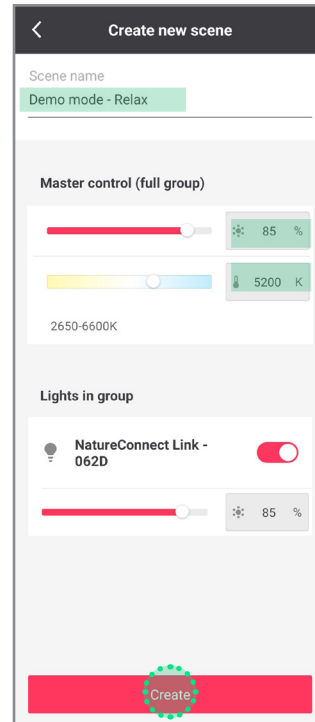

Set brightness to 85%
Set CCT to 5200 K



© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

All trademarks are owned by Signify Holding or their respective owners