





PHILIPS

Ledinaire Waterproof




WT065C G3

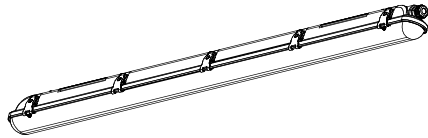

Product Description	CCT(K)	System light output(Lm)	P(W)	Energy Efficiency Class of Light source	Dimensions (mm)		
					L	A	
WT065C G3 LED24S/840 PSU L1200 ELR BN	4000	2400	22	D	1207	660-880	1.2
WT065C G3 LED48S/840 PSU L1200 ELR BN		4800	44	D	1207	660-880	1.2
WT065C G3 LED35S/840 PSU L1500 ELR BN		3500	31	D	1507	960-1160	1.45
WT065C G3 LED68S/840 PSU L1500 ELR BN		6800	53	C	1507	960-1160	1.45
WT065C G3 LED74S/840 PSU L1500 ELR BN		7400	54	C	1507	960-1160	1.45

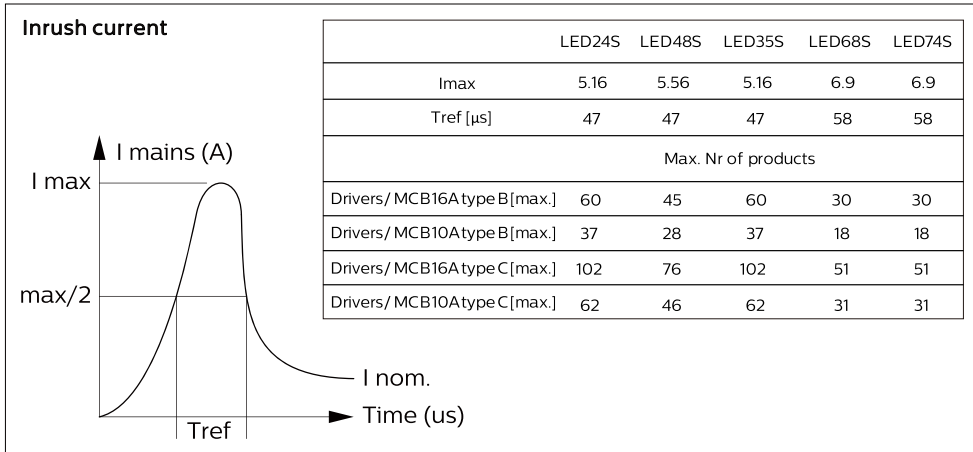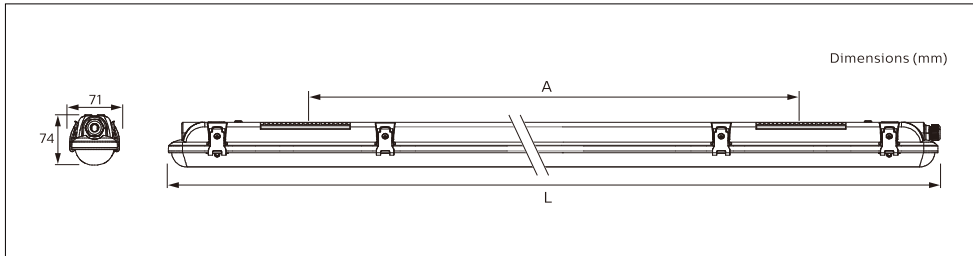


- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Do not store/install/use the luminaire in corrosive environment with hazardous substances, e.g., sulphur, chlorine, phthalates etc., or on the location where it is exposed to conductive dust, heavily grease (esp. mineral oil or distillates, e.g., petroleum), heavily naphthenic treated with hydrogen.
- This product is not suitable for cold & humid storage areas, especially where obvious temperature gradients are present, such as ventilation opening, door, etc.
- Do not install the luminaire on the location where it is exposed to direct sunlight. UV radiation will damage the material over time, resulting in loss of waterproof sealing and IP65 rating.
- Do not stare into LED light beam.

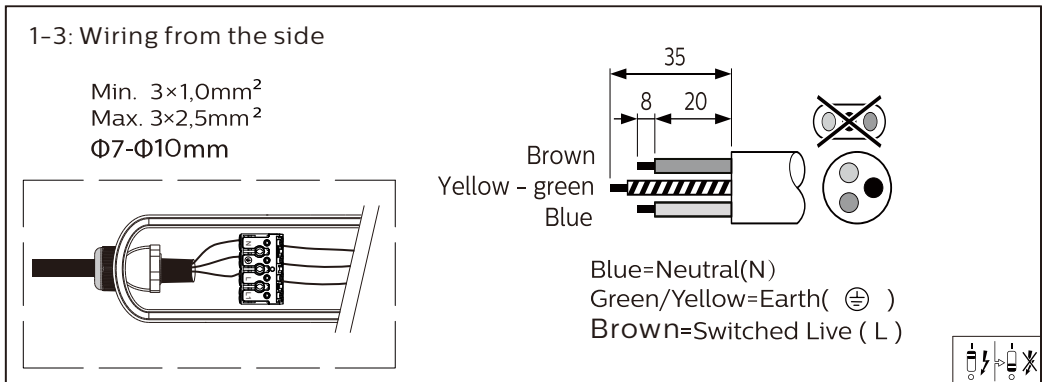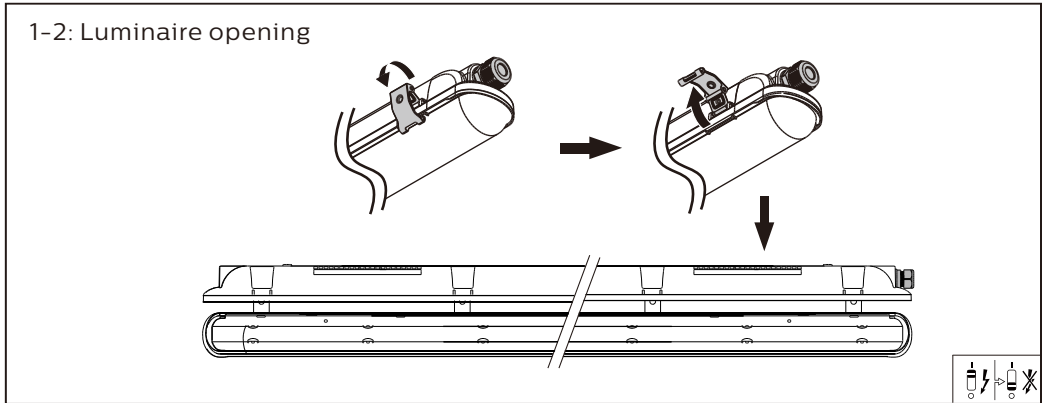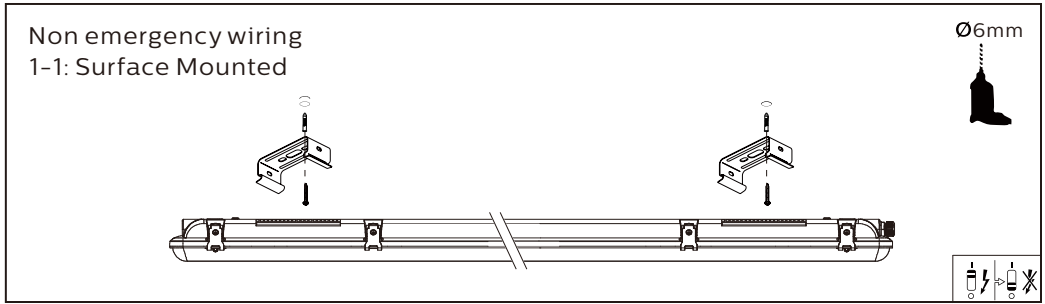


2-1: Emergency wiring


A Luminaire opening



C Emergency LED installation



B Emergency installation

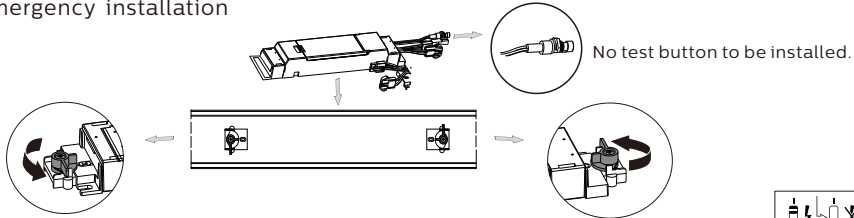

2-2: (option with additional emergency module EM300V)

Emergency Module:
 Follow manual instruction of EM300V
 Order Code: 912401483460
 EM300V ELP3 kit HV 6.4V 2000mAh LFP
 The emergency pack is not provided.







3 Log book



No tie wrap

2


1 Date of

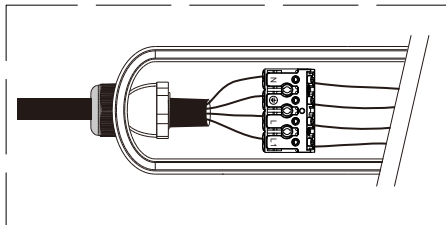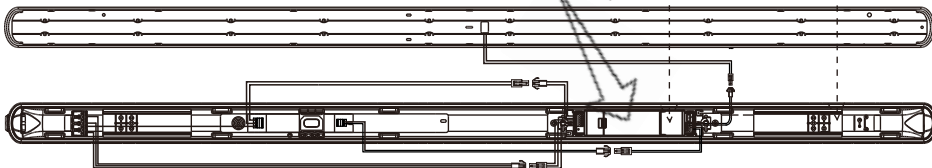

Blue=Neutral(N)
 Green/Yellow=Earth(⊕)
 Black =Switched Live (L1)
 Brown=Unswitched Live (L)




2-3:

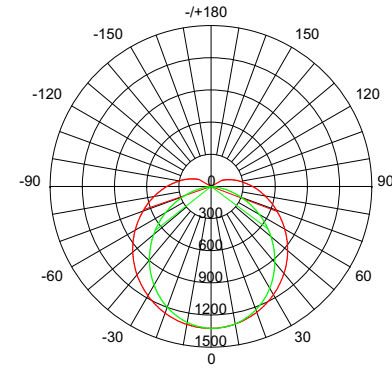

Rated lumen output in emergency mode: min 280lm

3: TW Optional



Warning/note! emergency wiring
 Through wiring cannot be combined
 with EM pack installation.

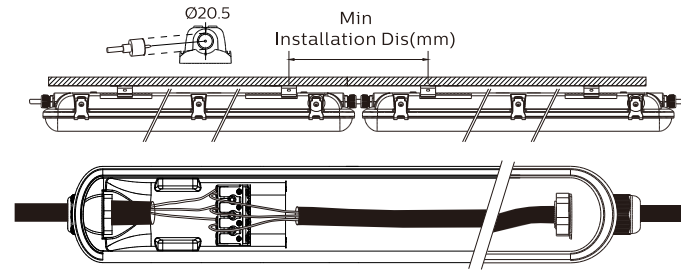

Type	Min installation distance(mm)
L1200	330
L1500	360



4: Close the luminaire

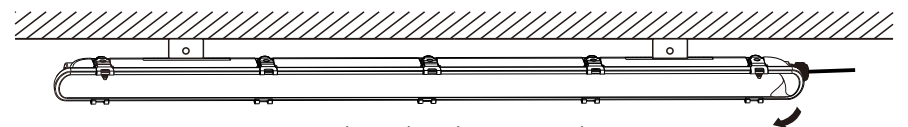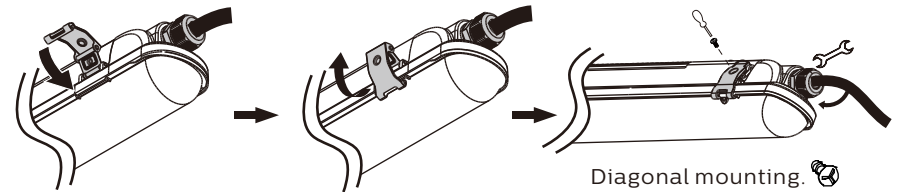

Foil needs to be removed.

