

Low-Voltage Power Module Distributed Low-Voltage Power System

Catalog#	Prepared by
Project	Date
Comments	Type



Low-Voltage Power Module

System Overview

The Distributed Low-Voltage Power system blends the benefits of both AC and DC power distribution to reduce the total installed cost of a lighting project by up to 20% while providing a completely flexible and electrically efficient solution.


Power Module Overview

Low-voltage power modules are designed to be distributed throughout a facility for an electrically efficient and energy code compliant installation. Power modules have integrated wiring compartments for 120-277VAC 50/60 Hz wiring and create multiple low-voltage circuits of up to 100W (connect 90W MAX per low-voltage circuit) to daisy-chain LED light fixtures. Power modules offer connectivity with occupancy and daylighting sensors (integral to fixtures and external), receptacle controls, wall stations and scene controllers. Power modules interface with external time clocks, demand response, and BMS / Egress systems all in a passively cooled and plenum rated housing.


Features

- Supports up to three manual control zones
- Provides power, manual control, occupancy and daylight sensing for up to three separate spaces
- Plenum rated and passively cooled
- Integrated Class 1 wiring compartments for normal and emergency circuit wiring for centralized UL924 operation
- Low-voltage output circuit for emergency output (emergency lighting)
- Demand response, time clock, and alert mode integration
- Simple DIP switch configuration
- Over 2000 square feet of LED lighting and controls coverage from a single power module
- Expandable coverage areas by connecting multiple power modules
- Supports integrated or external sensors
- Centralized maintenance and configuration
- Centralized system trim (high and low end) for comfort and energy savings

Specifications

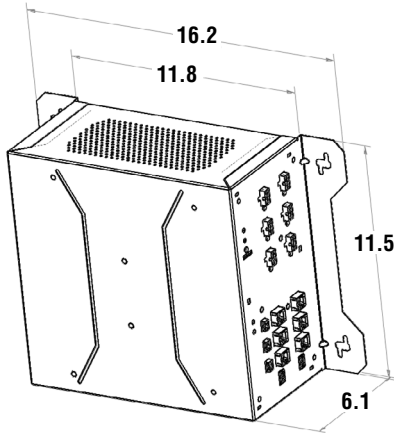

Dimensions (inches)

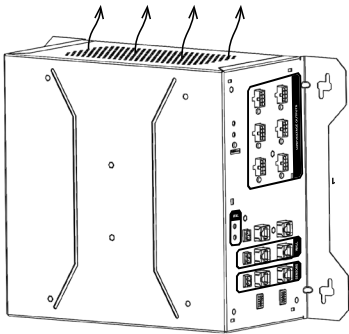

Mounting Orientation

Input Voltage	120-277VAC (50/60 Hz)			
Input Current	Normal Power Input		EM Power Input	
	120VAC	277VAC	120VAC	277VAC
LVPM-03-100-03-1E	1.76	0.76	0.88	0.38
LVPM-06-100-03-1E	4.40	1.90	0.88	0.38
Power Factor	Pf ≥ 0.9 at 50% or greater loads			
Total Harmonic Distortion	THDi ≤ 10% at 50% or greater loads			
Class 2 output	1.6A MAX @ 57VDC (nom) per low-voltage circuit Connect 90W MAX per low-voltage circuit			
Class 2 outputs	300W = 3 (1 EM output)			
	600W = 6 (1 EM output)			
Operating environment	32°F - 104°F (0°C - 40°C) Indoor dry locations only			
Weight	10 lbs (4.5kg)			
Standards	UL 2108 Listed			
	UL 924 Listed			

FCC Title 47 Part 15b Listed

Installation


The line voltage wiring compartments of the low-voltage power module provides the installing contractor access to make all line voltage connections without additional junction boxes. The integrated wiring compartments allow for normal only or normal and emergency panel wiring. LED light fixtures are connected in a daisy-chain fashion with plug-n-play low-voltage lighting cables. Control devices including wall stations, sensors, and receptacle switch packs are connected with pre-terminated control cables. System configuration is enabled through simple DIP switches located on the face of the low-voltage power module. Addressable LED light fixtures are assigned to control zones with DIP switches located on the back of the fixture or through a handheld remote (integrated sensor models only).

To achieve UL924 operation, connect both normal and emergency (normally hot) power circuits to a power module. During a normal power failure, the emergency power circuit energizes only low-voltage output circuit 3 and all lights connected to low-voltage DC circuit 1 go to 100%. Lights on other low-voltage output circuits turn off to minimize the emergency panel load.


Operation

Low-voltage power modules receive power from line voltage AC and produce multiple low-voltage DC power circuits. These low-voltage power circuits provide power and communications to LED light fixtures through plenum-rated pre-terminated cables for fast error-free connectivity. Control devices are connected in a similar manner using pre-terminated control cables (cables available separately) to complete an energy code compliant installation.

DLVP Wiring Diagram

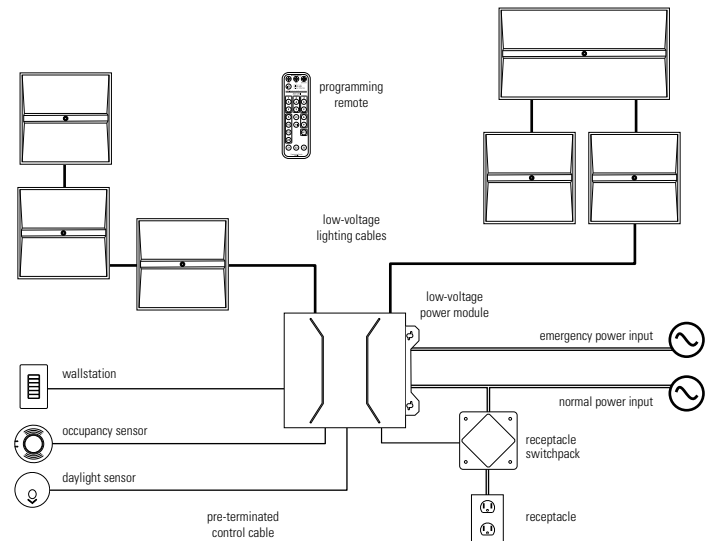

DLVP Centralized UL924 Diagram

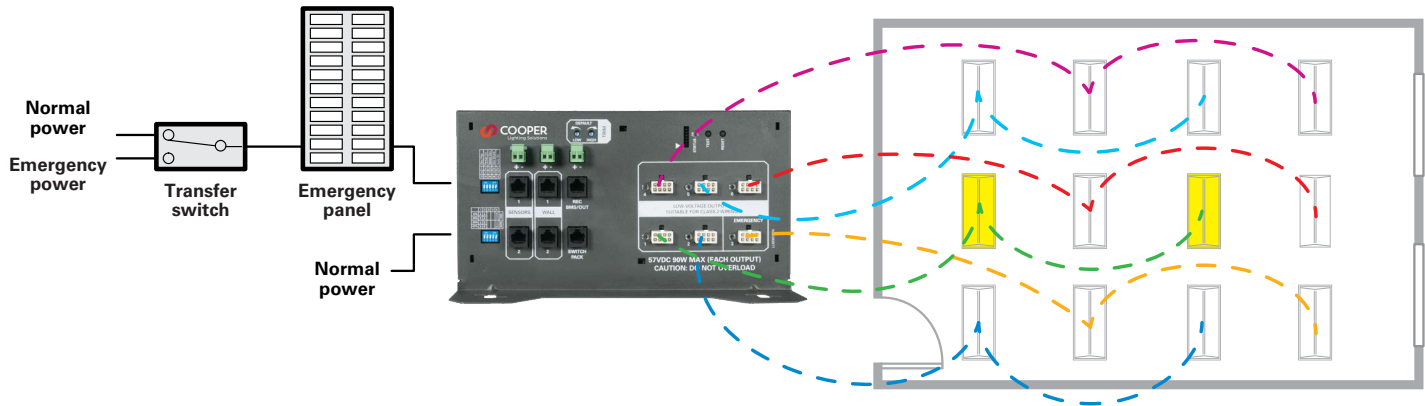

Note: When normal power is de-energized and emergency panel is energized, lighting on low-voltage output circuit #3 goes to 100% while other low-voltage output circuits are OFF / de-energized.

Ordering

Low-Voltage Power Modules

Catalog #	Description	Voltage
LVPM-03-100-03-1E	300W Low-Voltage Power Module	120/277 VAC, 50/60 Hz
LVPM-06-100-03-1E	600W Low-Voltage Power Module	120/277 VAC, 50/60 Hz

Additional Options

Low-Voltage Lighting Cable

Catalog #	Description
LVC-8P	DLVP Low-Voltage Plenum Rated Cable, 8 feet
LVC-15P	DLVP Low-Voltage Plenum Rated Cable, 15 feet
LVC-30P	DLVP Low-Voltage Plenum Rated Cable, 30 feet
LVC-COUPLER	DLVP Low-Voltage Plenum Rated Coupling

Pre-terminated Control Cable

Catalog #	Description
GGRC-COUPLER	RJ45 Coupler
GGRC-SPLITTER	RJ45 Splitter
GGRJ45-006-G	RJ45 cables 6 inches
GGRJ45-03-G	RJ45 cables 3 feet
GGRJ45-10-G	RJ45 cables 10 feet
GGRJ45-25-G	RJ45 cables 25 feet
GGRJ45-50-G	RJ45 cables 50 feet
GGRJ45-100-G	RJ45 cables 100 feet
GGRJ45-10P-G	RJ45 cables 10 feet plenum rated
GGRJ45-25P-G	RJ45 cables 25 feet plenum rated
GGRJ45-50P-G	RJ45 cables 50 feet plenum rated
GGRJ45-100P-G	RJ45 cables 100 feet plenum rated

Note: See www.cooperlighting.com for more information.

Cooper Lighting Solutions
 1121 Highway 74 South
 Peachtree City, GA 30269
www.cooperlighting.com
 For service or technical assistance:
 1-800-553-3879

© 2020 Cooper Lighting Solutions
 All Rights Reserved
 Printed in USA
 Publication No. TD503167EN
 May 2019

Specifications and dimensions subject to change without notice.