



LED BR30

7.2BR30/COR/930/P/E26/DIM 6/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

Product data

| General Information | | Wattage Equivalent | |
|---------------------------------------|-----------------------------------|-------------------------------|---------------|
| Cap-Base | E26 [Single Contact Medium Screw] | | 65 W |
| Nominal lifetime | 15,000 hour(s) | Starting Time (Nom) | 0.5 s |
| Switching Cycle | 50,000 | Warm-up time to 60% light | 0.5 s |
| Lighting Technology | LED | Power Factor (Fraction) | 0.7 |
| EU RoHS compliant | Yes | Voltage (Nom) | 120 V |
| Light Technical | | Temperature | |
| Color Code | 930 [CCT of 3000K] | T-Case Maximum (Nom) | 75 °C |
| Beam Angle (Nom) | 90 degree(s) | Controls and Dimming | |
| Luminous Flux | 650 lm | Dimmable | Yes |
| Color Designation | White (WH) | Mechanical and Housing | |
| Correlated Color Temperature (Nom) | 3000 K | Bulb Finish | Frosted |
| Luminous Efficacy (rated) (Nom) | 90.00 lm/W | Bulb Material | Plastic |
| Color Consistency | <4 | Bulb Shape | BR30 |
| Color rendering index (CRI) | 90 | UL Wet/ damp/ dry location | Damp location |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % | Approval and Application | |
| Operating and Electrical | | Energy Consumption kWh/1000 h | - kWh |
| Line Frequency | 60 Hz | Energy Certifications | Energy Star |
| Input Frequency | 60 Hz | T20 compliant | Yes |
| Power Consumption | 7.2 W | | |
| Lamp Current (Nom) | 82 mA | | |

LED BR30

Application Conditions


can it be used in closed luminaires Yes

Product Data

| | |
|--------------------|-------------------------------------|
| Order product name | 7.2BR30/COR/930/P/E26/DIM 6/1FB T20 |
| Full product name | 7.2BR30/COR/930/P/E26/DIM 6/1FB T20 |
| Order code | 929002032104 |


| | |
|---------------------------------|----------------|
| Material Nr. (12NC) | 929002032104 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 046677545901 |
| Numerator - Packs per outer box | 6 |
| EAN/UPC - Case | 50046677545906 |

Dimensional drawing




| Product | D | C |
|-------------------------------------|-------|--------|
| 7.2BR30/COR/930/P/E26/DIM 6/1FB T20 | 95 mm | 132 mm |


Photometric data



Light Distribution Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

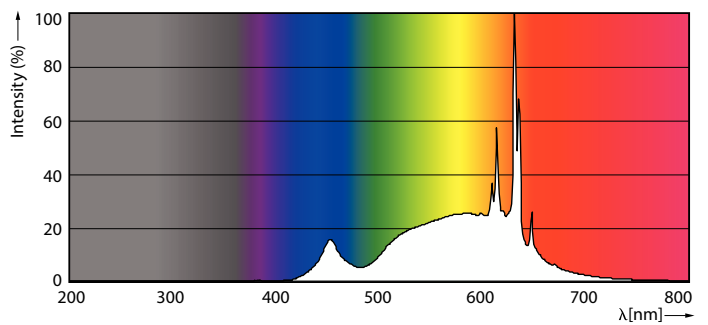

Spectral Power Distribution Colour - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20





General Uniform Light

Accent Lighting Spots - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

LED BR30

Lifetime

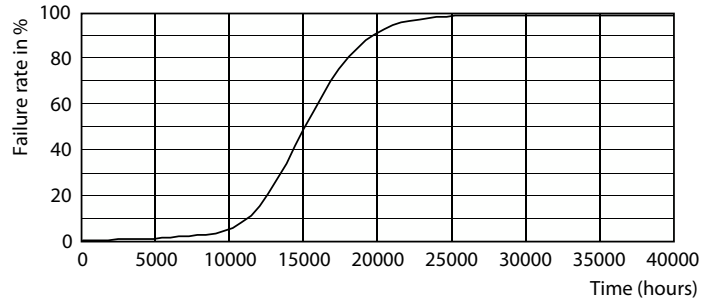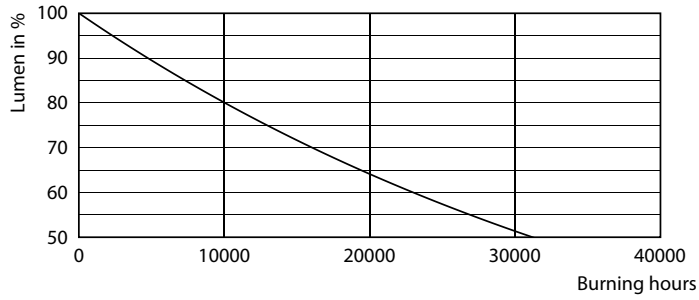

Lumen Maintenance Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

Life Expectancy Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

