



Classic LEDspotLV

LEDClassic 5-50W MR16 840 60D 6pack

LEDspotLV Classic offers an archetypal halogen-like design while delivering the benefits of LED technology, saving around 85% on energy consumption, minimizing maintenance cost, and much more besides. It is compatible with most existing fixtures with a GU 5.3 holder and is designed as a retrofit replacement for halogen or incandescent spots.

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	15,000 h
Switching Cycle	50,000
Rated Lifetime (Hours)	15,000 h
Lighting Technology	LED
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	60 degree(s)
Luminous Flux	410 lm
Luminous Intensity (Nom)	420 cd
Color Designation	Cool White (CW)
Luminous Efficacy (rated) (Nom)	82 lm/W
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz

Power Consumption	5 W
Lamp Current (Nom)	580 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	ac electronic 12 V
Temperature	
Ambient temperature range	-20 to +40 °C
T-Case Maximum (Nom)	65 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	MR16
Approval and Application	
Suitable For Accent Lighting	Yes


Datasheet, 2023, July 10 data subject to change

Classic LEDspotLV

Energy Consumption kWh/1000 h	6 kWh
EU RoHS compliant	Yes
EyeComfort	Yes
LED Innovations	EyeComfort
Product Data	
Order product name	LEDClassic 5-50W MR16 840 60D 6pack
Full product name	LEDClassic 5-50W MR16 840 60D 6pack
Full product code	871869681919700
Local code description	LED5MR16840NC6


Order code	929001280598
Material Nr. (12NC)	929001280598
Local order code	LED5MR16840NC6
Numerator - Quantity Per Pack	6
Net Weight (Piece)	0.040 kg
EAN/UPC - Product/Case	8718696819197
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696819203


Dimensional drawing



Product	D	С
LEDClassic 5-50W MR16 840 60D 6pack	50.5 mm	45.5 mm

Photometric data

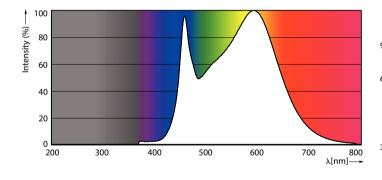




Spectral Power Distribution Colour - LEDClassic 5-50W MR16 840 60D 6pack

Light Distribution Diagram - LEDClassic 5-50W MR16 840 60D 6pack

Classic LEDspotLV


Photometric data




Calculat Procumerus 4.5 Philips Lighting RV. Pages 15

Accent Lighting Spots - LEDClassic 5-50W MR16 840 60D 6pack

Lifetime

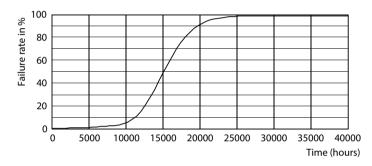

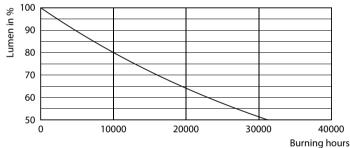

Life Expectancy Diagram

Lumen Maintenance Diagram



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.