



Classic filament LEDbulbs

LED CLA 4W A60 B22 2700K FR UE SRT6

Featuring a classic heritage design, LED Deco Classic delivers beautiful, decorative warm-white light while saving around 90% on energy costs.

Product data

| General Information | |
|--|--------------------|
| Cap-Base | B22 |
| Nominal lifetime | 50,000 h |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| | |
| Light Technical | |
| Color Code | 827 [CCT of 2700K] |
| Beam Angle (Nom) | 300 degree(s) |
| Luminous Flux | 840 lm |
| Color Designation | Warm White (WW) |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 210 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Photobiological safety according to EN 624 | 71 RG1 |
| | |
| Operating and Electrical | |
| | |

| Operating and Electrical | |
|--------------------------|-------------|
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 4 W |
| Lamp Current (Nom) | 43 mA |
| | |


| Wattage Equivalent | 60 W | |
|---------------------------|----------------|--|
| Starting Time (Nom) | 0.5 s | |
| Warm-up time to 60% light | 0.5 s | |
| Power Factor (Fraction) | 0.4 | |
| Voltage (Nom) | 220-240 V | |
| | | |
| Temperature | | |
| T-Case Maximum (Nom) | 70 °C | |
| | | |
| Controls and Dimming | | |
| Dimmable | No | |
| | | |
| Mechanical and Housing | | |
| Bulb Finish | Frosted | |
| Bulb Material | Glass | |
| Bulb Shape | A60 | |
| Net Weight (Piece) | 0.036 kg | |
| | | |
| Approval and Application | | |
| EU RoHS compliant | Yes | |
| EyeComfort | Yes | |
| LED Innovations | UltraEfficient | |

Classic filament LEDbulbs


| Ambient temperature range | -20 to +45 °C |
|---------------------------|-------------------------------------|
| | |
| Product Data | |
| Order product name | LED CLA 4W A60 B22 2700K FR UE SRT6 |
| Full product name | LED CLA 4W A60 B22 2700K FR UE SRT6 |
| Full product code | 872016939423000 |
| Order code | 929003623819 |
| | |

| Material Nr. (12NC) | 929003623819 |
|---------------------------------|---------------|
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169394230 |
| Numerator - Packs per outer box | 6 |
| EAN/UPC - Case | 8720169394247 |
| | |

Dimensional drawing




| Product | D | с |
|-------------------------------------|-------|--------|
| LED CLA 4W A60 B22 2700K FR UE SRT6 | 60 mm | 102 mm |

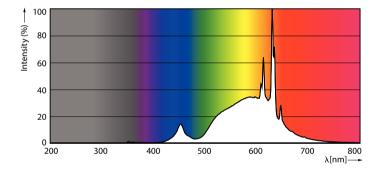

Spectral Power Distribution Colour - LED CLA 4W A60 B22 2700K FR UE SRT6

Photometric data




Light Distribution Diagram - LED CLA 4W A60 B22 2700K FR UE SRT6

| | 1× | 9298036238 4W |
|---------------|----|----------------------|
| | | Coldan. |
| | | |
| Second States | | |

General uniform lighting - LED CLA 4W A60 B22 2700K FR UE SRT6

Classic filament LEDbulbs

Lifetime

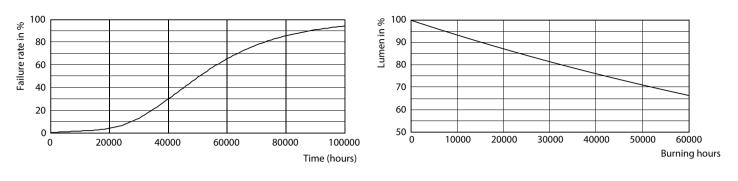

Life Expectancy Diagram

Lumen Maintenance Diagram - LED CLA 4W A60 B22 2700K FR UE SRT6



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.