

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Essential

TC BR-L P

Signify N.V.



GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Essential large, medium in recessed, surface mount and pendant versions
Additional labels	TC BR-L P 46S/940 DIA OC WH401T102
Product reference	912500108561
Place of production	Belgium
Period for data	2022
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit of 4600 lumens over 50,000 hours
Declared unit mass	4.55 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	87.9
GWP-total, A1-A3 (kgCO ₂ e)	85.4
Secondary material, inputs (%)	14.5
Secondary material, outputs (%)	49.9
Total energy use, A1-A3 (kWh)	375.0
Total water use, A1-A3 (m ³ e)	0.93

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Introducing Signify, the world leader in lighting solutions for professionals, consumers, and the Internet of Things. We are excited to present our PHILIPS MY CREATION brand, which provides REMARKABLE LIGHTING that is SUSTAINABLY PRINTED. With PHILIPS MY CREATION, you can create ambiances that set your space apart. Our amazing shapes and unique textures, enabled by cutting-edge 3D printing technology, create memorable experiences. And the best part? We use waste, recycled and bio-circular materials, to create mesmerizing new lights.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

Essential offers you unparalleled functionality and customization matching every style. With a wide range of color and textures, it seamlessly blends into any decor, while providing functional lighting that meets office lighting requirements.

The Essential can be connected to other systems to create a smart office lighting solution with integrated sensors to avoid a 'sensor acne' in your beautifully designed ceilings. It offers high flexibility with recessed, surface and pendant mounting options.

All printed parts are produced with at least 55% mass-balanced bio-circular material, which makes Essential a conscious choice for those who want to contribute to a circular economy.

Product family: Essential

Types covered by this EPD: Essential large, medium in recessed, surface mount and pendant versions.

Type selected for this EPD: TC BR-L P 46S/940 DIA OC WH401T102

Luminous flux: 4600 lm

System power: 34,5 W

Light color: Light Color 4000K | CRI 90+

Driver options: PSU, DALI for InterAct, WIA Interact system wireless

For more information please visit:

<https://pro.mycreation.lighting.philips.com/lightingsolutions/downlights/essential>

Further information can be found at

<https://pro.mycreation.lighting.philips.com/>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	QUANTITY, kg	Recycled %	Material origin
Ferrous metals	0.160	0	EU
Non-ferrous metals	0.123	0	EU
Plastics & rubbers	3.297	0	EU, ASIA
Electronic and electrical equipment (LED, Driver)	0.975	0	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.56

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	4.555 kg
Functional unit	4600 lumens over 50000 hours
Reference service life	50,000 hours



SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational	Operational	Deconstr./demo	Transport	Waste	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify’s manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Signify’s production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of

the waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe’s electricity grid mix (B6).

The total power consumption of the reference product is calculated as follows:

Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.


Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment center. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting

system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The wooden pallet and other plastic packaging used during transportation is also incinerated for energy recovery and/or recycled. The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

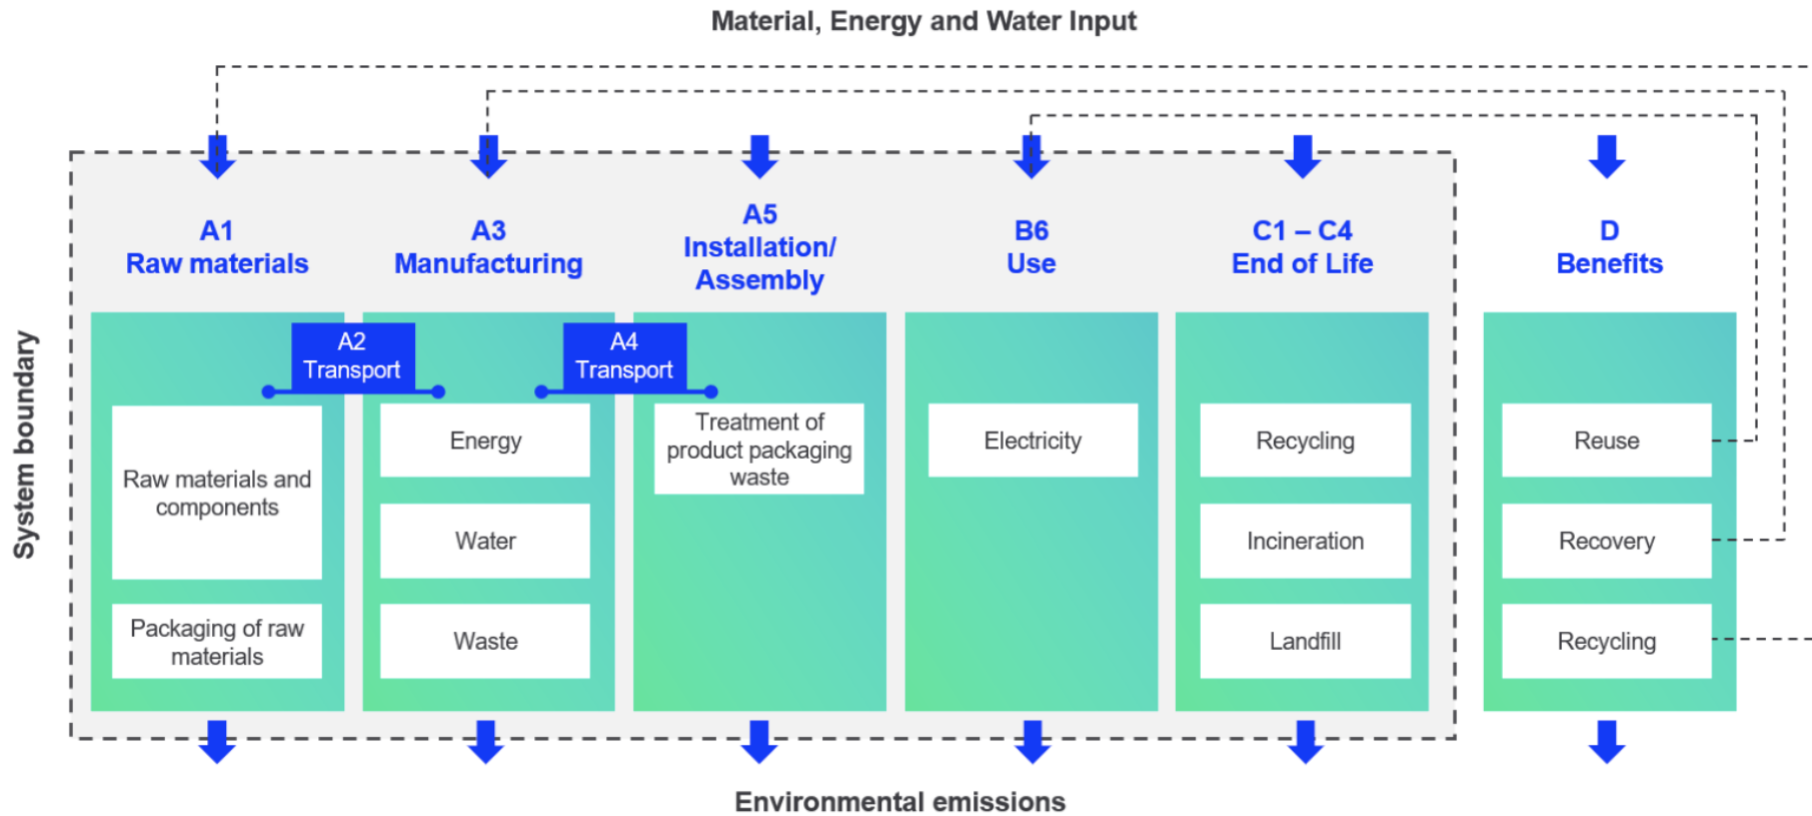

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	71.5	1.12	12.9	85.4	1.12	2.07	MNR	MNR	MNR	MNR	MNR	683.0	MNR	MNR	0.0779	3.93	2.06	-14.5
GWP – fossil	kg CO ₂ e	71.9	1.12	14.9	87.9	1.12	0.053	MNR	MNR	MNR	MNR	MNR	682.0	MNR	MNR	0.0778	3.93	2.06	-14.5
GWP – biogenic	kg CO ₂ e	-0.56	0.0	-2.02	-2.58	0.000431	2.02	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	-0.0172
GWP – LULUC	kg CO ₂ e	0.108	0.000429	0.0185	0.127	0.000411	1.81e-05	MNR	MNR	MNR	MNR	MNR	1.59	MNR	MNR	2.87e-05	0.000148	4.62e-05	-0.00881
Ozone depletion pot.	kg CFC ₁₁ e	7.64e-06	2.55e-07	1.53e-06	9.43e-06	2.57e-07	5.3e-09	MNR	MNR	MNR	MNR	MNR	3.46e-05	MNR	MNR	1.79e-08	1.2e-08	9.12e-09	-3.83e-07
Acidification potential	mol H ⁺ e	0.528	0.00611	0.0588	0.593	0.00472	0.000415	MNR	MNR	MNR	MNR	MNR	3.89	MNR	MNR	0.00033	0.00136	0.000609	-0.198
EP-freshwater ²⁾	kg Pe	0.00997	8.9e-06	0.000412	0.0104	9.13e-06	5.55e-07	MNR	MNR	MNR	MNR	MNR	0.0722	MNR	MNR	6.37e-07	4.39e-06	9.93e-07	-0.000952
EP-marine	kg Ne	0.0735	0.00173	0.0123	0.0876	0.0014	0.000176	MNR	MNR	MNR	MNR	MNR	0.516	MNR	MNR	9.8e-05	0.000503	0.000372	-0.0165
EP-terrestrial	mol Ne	0.814	0.0192	0.113	0.947	0.0155	0.00182	MNR	MNR	MNR	MNR	MNR	5.88	MNR	MNR	0.00108	0.00528	0.00269	-0.199
POCP (“smog”) ³⁾	kg NMVOCe	0.264	0.00587	0.037	0.307	0.00495	0.000456	MNR	MNR	MNR	MNR	MNR	1.61	MNR	MNR	0.000346	0.00131	0.000705	-0.0575
ADP-minerals & metals ⁴⁾	kg Sbe	0.00787	2.57e-06	0.000488	0.00836	2.61e-06	1.74e-07	MNR	MNR	MNR	MNR	MNR	0.00637	MNR	MNR	1.82e-07	2.92e-06	2.41e-07	-0.00258
ADP-fossil resources	MJ	954.0	16.6	218.0	1190.0	16.7	0.412	MNR	MNR	MNR	MNR	MNR	14500.0	MNR	MNR	1.17	1.55	0.775	-150.0
Water use ⁵⁾	m ³ e depr.	30.7	0.0735	7.58	38.4	0.0749	0.0974	MNR	MNR	MNR	MNR	MNR	396.0	MNR	MNR	0.00523	0.17	0.0883	-2.13

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.15e-06	1.24e-07	5.37e-07	4.81e-06	1.29e-07	3.86e-09	MNR	MNR	MNR	MNR	MNR	1.28e-05	MNR	MNR	8.97e-09	1.11e-08	5.45e-09	-1.18e-06
Ionizing radiation ⁶⁾	kBq U235e	5.47	0.0791	0.5	6.05	0.0798	0.00149	MNR	MNR	MNR	MNR	MNR	393.0	MNR	MNR	0.00557	0.0103	0.0032	-1.01
Ecotoxicity (freshwater)	CTUe	4190.0	14.8	375.0	4580.0	15.1	2.84	MNR	MNR	MNR	MNR	MNR	9870.0	MNR	MNR	1.05	10.7	108.0	-903.0
Human toxicity, cancer	CTUh	1.31e-07	3.83e-10	9.32e-09	1.4e-07	3.7e-10	1.29e-10	MNR	MNR	MNR	MNR	MNR	3.23e-07	MNR	MNR	2.58e-11	4.25e-10	1.56e-09	-1.73e-08
Human tox. non-cancer	CTUh	4.58e-06	1.45e-08	3.45e-07	4.93e-06	1.49e-08	5.36e-09	MNR	MNR	MNR	MNR	MNR	1.06e-05	MNR	MNR	1.04e-09	1.62e-08	1.01e-07	-1.7e-06
SQP ⁷⁾	-	333.0	18.5	85.3	437.0	19.3	0.225	MNR	MNR	MNR	MNR	MNR	2620.0	MNR	MNR	1.35	0.857	0.976	-71.8

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	81.6	0.185	185.0	267.0	0.189	0.0136	MNR	MNR	MNR	MNR	MNR	2950.0	MNR	MNR	0.0132	0.139	0.0264	-12.1
Renew. PER as material	MJ	5.2	0.0	17.7	22.9	0.0	-17.7	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Total use of renew. PER	MJ	86.8	0.185	203.0	290.0	0.189	-17.7	MNR	MNR	MNR	MNR	MNR	2950.0	MNR	MNR	0.0132	0.139	0.0264	-12.1
Non-re. PER as energy	MJ	851.0	16.6	216.0	1080.0	16.8	0.412	MNR	MNR	MNR	MNR	MNR	14500.0	MNR	MNR	1.17	1.55	0.776	-149.0
Non-re. PER as material	MJ	104.0	0.0	0.151	104.0	0.0	-0.151	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	-44.8	-44.8	2.68
Total use of non-re. PER	MJ	954.0	16.6	216.0	1190.0	16.8	0.261	MNR	MNR	MNR	MNR	MNR	14500.0	MNR	MNR	1.17	-43.2	-44.0	-146.0
Secondary materials	kg	0.662	0.00473	1.46	2.12	0.00465	0.000491	MNR	MNR	MNR	MNR	MNR	1.49	MNR	MNR	0.000325	0.00115	0.0011	0.412
Renew. secondary fuels	MJ	0.0617	4.56e-05	0.0991	0.161	4.69e-05	8.1e-06	MNR	MNR	MNR	MNR	MNR	0.0121	MNR	MNR	3.28e-06	6.2e-05	1.8e-05	-0.0033
Non-ren. secondary fuels	MJ	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Use of net fresh water	m ³	0.745	0.00211	0.182	0.93	0.00217	0.0017	MNR	MNR	MNR	MNR	MNR	12.5	MNR	MNR	0.000151	0.00617	0.00316	-0.0825

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8.62	0.0221	0.721	9.36	0.0222	0.00121	MNR	MNR	MNR	MNR	MNR	52.1	MNR	MNR	0.00155	0.00625	0.0604	-1.78
Non-hazardous waste	kg	136.0	0.356	13.6	150.0	0.365	1.36	MNR	MNR	MNR	MNR	MNR	3300.0	MNR	MNR	0.0255	1.78	2.22	-60.4
Radioactive waste	kg	0.00162	0.000112	0.000216	0.00195	0.000112	6.73e-07	MNR	MNR	MNR	MNR	MNR	0.106	MNR	MNR	7.82e-06	2.84e-06	0.0	-0.000343

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Materials for recycling	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.653	0.0	0.0
Materials for energy rec	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Exported energy	MJ	0.0	0.0	0.792	0.792	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	37.1	0.0	0.0

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	69.4	1.1	14.7	85.2	1.1	0.0506	MNR	MNR	MNR	MNR	MNR	675.0	MNR	MNR	0.077	3.92	2.03	-14.2
Ozone depletion Pot.	kg CFC ₁₁ e	8.34e-06	2.02e-07	1.32e-06	9.86e-06	2.03e-07	4.63e-09	MNR	MNR	MNR	MNR	MNR	3e-05	MNR	MNR	1.42e-08	1.06e-08	7.7e-09	-3.21e-07
Acidification	kg SO ₂ e	0.446	0.00478	0.0483	0.499	0.00367	0.000303	MNR	MNR	MNR	MNR	MNR	3.3	MNR	MNR	0.000256	0.00102	0.000443	-0.172
Eutrophication	kg PO ₄ e	0.211	0.000941	0.0185	0.231	0.000836	0.000226	MNR	MNR	MNR	MNR	MNR	2.54	MNR	MNR	5.83e-05	0.000661	0.0066	-0.0416
POCP ("smog")	kg C ₂ H ₄ e	0.0292	0.00017	0.00306	0.0325	0.000143	9.46e-06	MNR	MNR	MNR	MNR	MNR	0.135	MNR	MNR	1e-05	3.02e-05	2.84e-05	-0.0075
ADP-elements	kg Sbe	0.00781	2.49e-06	0.000486	0.0083	2.53e-06	1.37e-07	MNR	MNR	MNR	MNR	MNR	0.00635	MNR	MNR	1.77e-07	2.84e-06	2e-07	-0.00258
ADP-fossil	MJ	936.0	16.6	218.0	1170.0	16.7	0.412	MNR	MNR	MNR	MNR	MNR	14500.0	MNR	MNR	1.17	1.55	0.775	-150.0

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (SI), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1 Light management functions (EPD Hub aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$4. \text{ Scaled Impact} = GWP_{case} * TSF$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

PFC	Lamp family	Driver type	Module color	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
								NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
Essential large	46S	PSU	930	4416	34.5	128	1.00	1.00	N/A	N/A	N/A	683.0	N/A	N/A	N/A
			940	4600	34.5	133	1.00	1.00	N/A	N/A	N/A	683.0	N/A	N/A	N/A
		DIA	930	4416	34.5	128	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
			940	4600	34.5	133	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
		IA4 / IA5	930	4416	34.5	128	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
			940	4600	34.5	133	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
	50S	PSU	930	5029	34.5	146	1.00	1.00	N/A	N/A	N/A	683.0	N/A	N/A	N/A
			940	5239	34.5	152	1.00	1.00	N/A	N/A	N/A	683.0	N/A	N/A	N/A
		DIA	930	5029	34.5	146	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
			940	5239	34.5	152	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
		IA4 / IA5	930	5029	34.5	146	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
			940	5239	34.5	152	1.00	1.00	0.75	0.75	0.55	683.0	512.3	512.3	375.7
	70S	PSU	930	6678	53.2	126	1.54	1.54	N/A	N/A	N/A	1053.2	N/A	N/A	N/A
			940	6956	53.2	131	1.54	1.54	N/A	N/A	N/A	1053.2	N/A	N/A	N/A
		DIA	930	6678	53.2	126	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
			940	6956	53.2	131	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
		IA4 / IA5	930	6678	53.2	126	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
			940	6956	53.2	131	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
	80S	PSU	930	7756	53.2	146	1.54	1.54	N/A	N/A	N/A	1053.2	N/A	N/A	N/A
			940	8079	53.2	152	1.54	1.54	N/A	N/A	N/A	1053.2	N/A	N/A	N/A
		DIA	930	7756	53.2	146	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
			940	8079	53.2	152	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
		IA4 / IA5	930	7756	53.2	146	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3
			940	8079	53.2	152	1.54	1.54	1.16	1.16	0.85	1053.2	789.9	789.9	579.3

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

4. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminaire (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$SI_{PEP} = Scaled\ GWP * \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

PFC	Lamp family	Driver type	Module color	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
								NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
Essential large	46S	PSU	930	4416	34.5	128	1.00	1.00	N/A	N/A	N/A	108.3	N/A	N/A	N/A
			940	4600	34.5	133	1.00	1.00	N/A	N/A	N/A	103.9	N/A	N/A	N/A
		DIA	930	4416	34.5	128	1.00	1.00	0.75	0.75	0.55	108.3	81.2	81.2	59.5
			940	4600	34.5	133	1.00	1.00	0.75	0.75	0.55	103.9	78.0	78.0	57.2
		IA4 / IA5	930	4416	34.5	128	1.00	1.00	0.75	0.75	0.55	108.3	81.2	81.2	59.5
			940	4600	34.5	133	1.00	1.00	0.75	0.75	0.55	103.9	78.0	78.0	57.2
	50S	PSU	930	5029	34.5	146	1.00	1.00	N/A	N/A	N/A	95.1	N/A	N/A	N/A
			940	5239	34.5	152	1.00	1.00	N/A	N/A	N/A	91.3	N/A	N/A	N/A
		DIA	930	5029	34.5	146	1.00	1.00	0.75	0.75	0.55	95.1	71.3	71.3	52.3
			940	5239	34.5	152	1.00	1.00	0.75	0.75	0.55	91.3	68.4	68.4	50.2
		IA4 / IA5	930	5029	34.5	146	1.00	1.00	0.75	0.75	0.55	95.1	71.3	71.3	52.3
			940	5239	34.5	152	1.00	1.00	0.75	0.75	0.55	91.3	68.4	68.4	50.2
	70S	PSU	930	6678	53.2	126	1.54	1.54	N/A	N/A	N/A	110.4	N/A	N/A	N/A
			940	6956	53.2	131	1.54	1.54	N/A	N/A	N/A	106.0	N/A	N/A	N/A
		DIA	930	6678	53.2	126	1.54	1.54	1.16	1.16	0.85	110.4	82.8	82.8	60.7
			940	6956	53.2	131	1.54	1.54	1.16	1.16	0.85	106.0	79.5	79.5	58.3
		IA4 / IA5	930	6678	53.2	126	1.54	1.54	1.16	1.16	0.85	110.4	82.8	82.8	60.7
			940	6956	53.2	131	1.54	1.54	1.16	1.16	0.85	106.0	79.5	79.5	58.3
	80S	PSU	930	7756	53.2	146	1.54	1.54	N/A	N/A	N/A	95.1	N/A	N/A	N/A
			940	8079	53.2	152	1.54	1.54	N/A	N/A	N/A	91.3	N/A	N/A	N/A
		DIA	930	7756	53.2	146	1.54	1.54	1.16	1.16	0.85	95.1	71.3	71.3	52.3
			940	8079	53.2	152	1.54	1.54	1.16	1.16	0.85	91.3	68.4	68.4	50.2
		IA4 / IA5	930	7756	53.2	146	1.54	1.54	1.16	1.16	0.85	95.1	71.3	71.3	52.3
			940	8079	53.2	152	1.54	1.54	1.16	1.16	0.85	91.3	68.4	68.4	50.2