



Entry bulb 1521m/2700K

1 x 1521 lm


Polar intensity diagram



Quantity estimation diagram

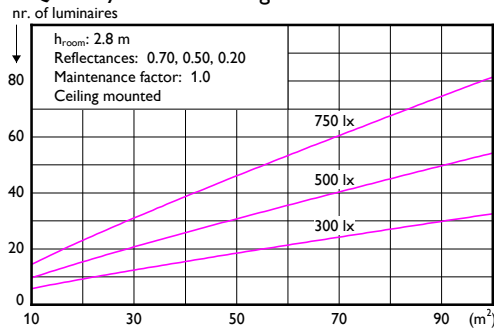

UGR diagram

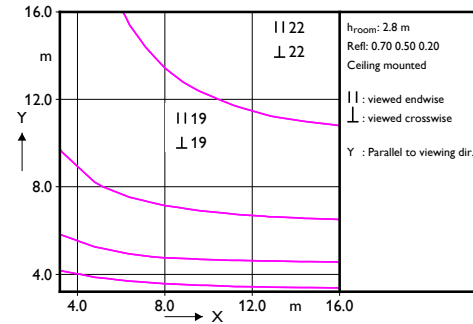

Light output ratio 1.00  
 Service upward 0.82  
 Service downward 0.18  
 CIE flux code 4 20 51 18 100

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)										
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00
0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.30	0.10	0.00	0.00
0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.60	0.33	0.31	0.29	0.28	0.27	0.21	0.15	0.12	0.10	0.08	0.00
0.80	0.42	0.39	0.36	0.35	0.34	0.28	0.20	0.16	0.13	0.10	0.01
1.00	0.48	0.45	0.42	0.41	0.39	0.33	0.24	0.20	0.15	0.13	0.01
1.25	0.55	0.51	0.48	0.46	0.44	0.38	0.28	0.24	0.18	0.15	0.02
1.50	0.61	0.55	0.53	0.50	0.48	0.42	0.31	0.27	0.20	0.18	0.03
2.00	0.69	0.62	0.60	0.57	0.54	0.48	0.36	0.32	0.23	0.21	0.04
2.50	0.75	0.66	0.65	0.61	0.58	0.53	0.39	0.36	0.26	0.23	0.05
3.00	0.79	0.69	0.68	0.64	0.61	0.56	0.42	0.38	0.28	0.25	0.06
4.00	0.85	0.73	0.73	0.69	0.65	0.61	0.45	0.42	0.30	0.28	0.08
5.00	0.89	0.76	0.77	0.72	0.67	0.64	0.48	0.45	0.32	0.30	0.09

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	1514	1514	1514	1514	1514	1514	1514
50.0	1895	1895	1895	1895	1895	1895	1895
55.0	2326	2326	2326	2326	2326	2326	2326
60.0	2843	2843	2843	2843	2843	2843	2843
65.0	3450	3450	3450	3450	3450	3450	3450
70.0	4174	4174	4174	4174	4174	4174	4174
75.0	5055	5055	5055	5055	5055	5055	5055
80.0	6121	6121	6121	6121	6121	6121	6121
85.0	7484	7484	7484	7484	7484	7484	7484
90.0	9084	9084	9084	9084	9084	9084	9084

(cd/m<sup>2</sup>)

sl17214

2015-02-03