



## Strip 1 x 9290026982 6500K

1 x 2450 lm


Polar intensity diagram



Quantity estimation diagram

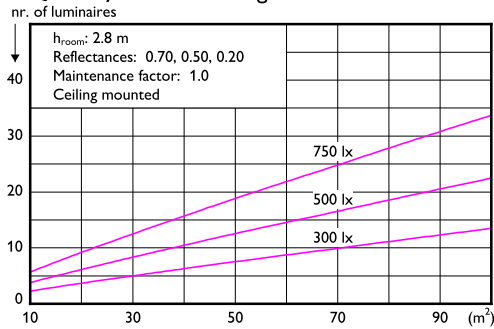

UGR diagram

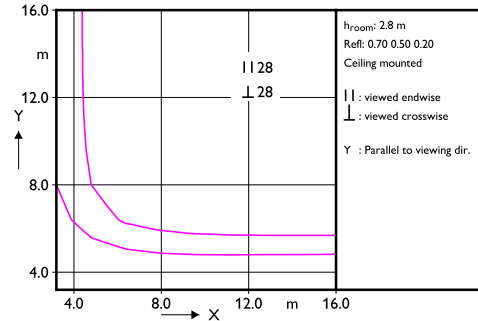

Light output ratio 1.00  
 Service upward 0.00  
 Service downward 1.00

CIE flux code 46 79 96 100 100

UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30
0.60	0.47	0.45	0.47	0.45	0.44	0.37	0.36	0.32	0.36	0.31	0.29	
0.80	0.58	0.55	0.57	0.56	0.54	0.46	0.46	0.41	0.45	0.40	0.38	
1.00	0.67	0.63	0.66	0.64	0.62	0.54	0.53	0.48	0.53	0.48	0.46	
1.25	0.76	0.70	0.74	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.53	
1.50	0.83	0.75	0.81	0.77	0.74	0.68	0.67	0.62	0.65	0.61	0.59	
2.00	0.93	0.83	0.90	0.86	0.82	0.76	0.75	0.71	0.74	0.70	0.68	
2.50	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.79	0.76	0.74	
3.00	1.04	0.91	1.01	0.96	0.90	0.86	0.85	0.81	0.83	0.80	0.78	
4.00	1.10	0.96	1.07	1.00	0.94	0.91	0.89	0.87	0.88	0.86	0.83	
5.00	1.14	0.98	1.11	1.03	0.97	0.94	0.92	0.90	0.91	0.89	0.86	

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	20333	19696	19138	18683	18349	18145	18077
50.0	20187	19437	18788	18264	17882	17650	17573
55.0	19847	18970	18221	17624	17192	16931	16845
60.0	19450	18418	17551	16870	16382	16090	15994
65.0	18645	17436	16443	15677	15136	14815	14710
70.0	17551	16120	14981	14125	13533	13185	13072
75.0	15659	13973	12700	11779	11158	10801	10685
80.0	13071	11046	9654	8712	8105	7766	7657
85.0	9118	6661	5325	4542	4083	3839	3763
90.0	386250	2374	1233	873	713	640	618

(cd/m<sup>2</sup>)

2021-08-11