



**SlimSurface** is a 5/8" thick LED surface mounted luminaire with the appearance of a recessed downlight. Easy to install into most standard j-boxes, the SlimSurface round apertures are available as a 5" 650lm, 7" 1000lm and 10" 2200lm fixture.

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Ordering guide

example: S5R830K7AL

Series	CRI	CCT	Lumens	Finish	Dimming
S5R SlimSurface 5" Round	8 80 9 90 <sup>1</sup>	27K 2700K	7 650lm	– White	blank ELV / Triac (120V)
		30K 3000K		AL Aluminum	
		35K 3500K		BK Black	
		40K 4000K		W White	Z10U 0-10V (120V-277V)
				AL Aluminum	
				BK Black	
S7R SlimSurface 7" Round	8 80 9 90 <sup>1</sup>	27K 2700K	10 1000lm	– White	blank ELV / Triac (120V)
		30K 3000K		AL Aluminum	
		35K 3500K		BK Black	
		40K 4000K		W White	Z10U 0-10V (120V-277V)
				AL Aluminum	
				BK Black	
S10R SlimSurface 10" Round <sup>2</sup>	8 80 9 90 <sup>1</sup>	27K 2700K	22 2200lm	W White	blank ELV / Triac (120V) Z10U 0-10V (120V-277V)
		30K 3000K		AL Aluminum	
		35K 3500K		BK Black	
		40K 4000K			



1. Configurations using 90 CRI are only available with 2700K & 3000K CCT.  
 2. IMPORTANT: SlimSurface LED 10" round installs into 4-11/16" J-box (not wet location listed).

### Features

- Flange:** One piece plastic flange. Injection molded white, applied aluminum or black.
- Lens:** High transmittance lens allowing for smooth, comfortable light pattern.
- Power supply:** Integral class 2 driver. Factory wired electronic LED driver (see Electrical section for specifications)
- LED Strip:** Utilizes LEDs.
- Lifetime:** Expected lifetime 50,000 hours and backed by a 5-year warranty\*
- Compliance:** Non-conductive fixture for shower light application (not applicable to metal trim model).

### Dimming

Intended for ELV/Triac (120V) or 0-10V dimming (120V-277V) based on the configuration. Min 90°C supply conductors.

### Electrical

**Electronic power supply:** RoHS compliant. Class 2 power unit. Unit tolerates sustained open and short circuit output conditions without damage.

Electrical specifications	Dimming	Input volts	Input frequency	Input current	Input Power	THD Factor	Power Factor	Minimum Operating Temp.
Slim 5" 650lm	Triac	120V	50/60Hz	0.08A	9.5W	<15%	>0.9	-20°C
	0-10V	120V	50/60Hz	0.09A	10.1W	<20%	>0.9	-20°C
		277V	50/60Hz	0.04A	10.2W	<20%	>0.9	-20°C
Slim 7" 1000lm	Triac	120V	50/60Hz	0.13A	14.2W	<15%	>0.9	-20°C
	0-10V	120V	50/60Hz	0.12A	14.4W	<20%	>0.9	-20°C
		277V	50/60Hz	0.06A	14.7W	<20%	>0.9	-20°C
Slim 10" 2200lm	Triac	120V	50/60Hz	0.20A	23.2W	<20%	>0.9	-20°C
	0-10V	120V	50/60Hz	0.20A	23.2W	<10%	>0.95	-20°C
		277V	50/60Hz	0.09A	24.6W	<15%	>0.95	-20°C

For more details, please see LED-DIM-DL spec sheet.  
 \* See Philips.com/warranties for warranty details.

### Labels

cULus listed. ENERGY STAR® certified. All models are damp location rated for walls or ceilings. The 5" & 7" are suitable for ceiling mount wet locations when installed per instructions.



# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## Compatibility (10" Round)

Install into 4-11/16" J-box:



4 11/16" square (metal)  
Compatible with S10R only

## Compatibility (5" & 7" Round)

Installs into standard J-box applications for 5" & 7" models:




3 1/2" round (plastic)



4" square (plastic)  
Not compatible with S5R



4" octagonal (metal)



4" square (metal)  
Not compatible with S5R






Fire rated J-box  
Fire rated classification is per the ceiling and junction box ratings.




Note: A 2 1/8" deep octagon junction box is recommended for through circuit wiring applications.

## Dimensions




### SlimSurface LED 5" downlight

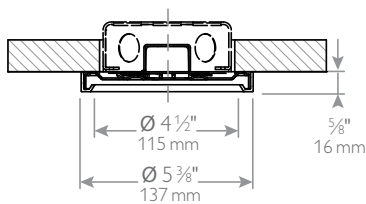

### SlimSurface LED 7" downlight

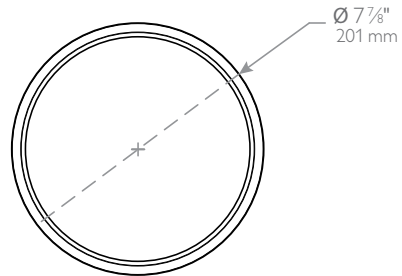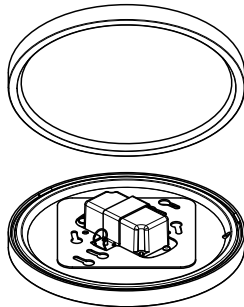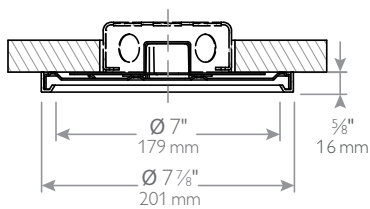

### SlimSurface LED 10" downlight

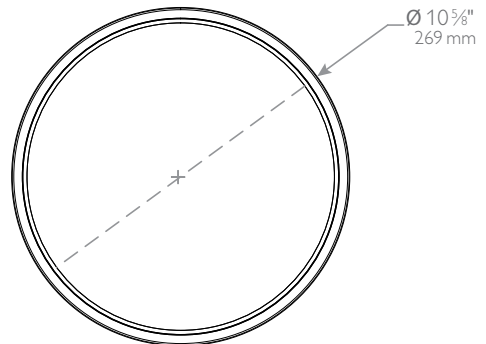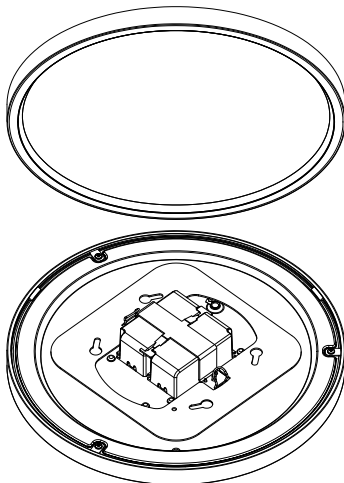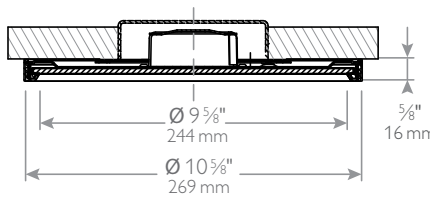


# S5R, S7R & S10R SlimSurface LED

## Round 5", 7" & 10" apertures

### S5R927K7 • 10W LED, 90CRI, 2700K

#### Candela Curves

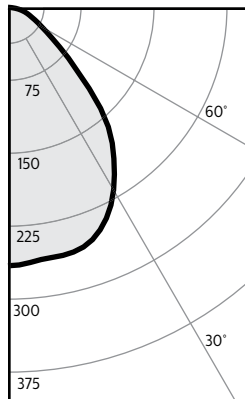

Angle	Mean CP	Lumens
0	266	25
5	263	
10	261	
15	260	736
20	254	
25	239	110
30	217	
35	190	118
40	160	
45	118	91
50	81	
55	55	51
60	40	
65	30	31
70	23	
75	18	18
80	11	
85	4	5
90	0	

#### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	11	6.0'
6'	7	7.2'
7'	5	8.4'
8'	4	9.6'
9'	3	10.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

#### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	21.8	0.40
6'	14.2	0.26
7'	10.2	0.19
8'	8.5	0.16
9'	6.8	0.13

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

#### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%											
	70	50	30	10	50	10	50	10	50	10	0											
Wall	Zonal cavity method - Effective floor reflectance = 20%																					
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	105	98	100	95	97	92	88	88	87	80	77	77	79	70	67	67	60
	2	102	96	90	85	94	84	90	82	87	80	77	77	79	71	67	67	79	70	67	60	60
	3	95	86	79	73	84	73	82	72	79	70	67	67	79	70	67	67	79	70	67	60	60
	4	88	78	70	64	76	64	74	63	72	62	60	60	79	70	67	67	79	70	67	60	60
	5	82	71	63	57	70	57	68	56	66	56	53	53	79	70	67	67	79	70	67	60	60
	6	76	64	57	51	64	51	62	50	60	50	48	48	79	70	67	67	79	70	67	60	60
	7	71	59	51	46	58	46	57	45	56	45	43	43	79	70	67	67	79	70	67	60	60
	8	67	54	47	42	54	41	53	41	51	41	39	39	79	70	67	67	79	70	67	60	60
	9	63	50	43	38	50	38	49	38	48	37	36	36	79	70	67	67	79	70	67	60	60
	10	59	47	40	35	46	35	45	34	44	34	33	33	79	70	67	67	79	70	67	60	60

#### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	208	39.8%
0-40	326	62.5%
0-60	469	89.7%
0-90	522	100.0%

#### CRI and CCT adjustment factors


90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

#### Report: 1053GFR

Output lumens:	523 lms	Efficacy:	57.4 lm/w
Spacing Criterion:	1.2	CCT <sup>3</sup> :	2700K
Beam Angle:	87°	CRI:	90min
Input Watts <sup>2</sup> :	9.1W		

### S7R927K10 • 14W LED, 90CRI, 2700K

#### Candela Curves

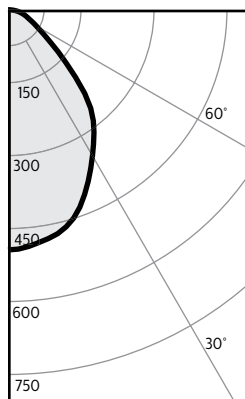

Angle	Mean CP	Lumens
0	496	46
5	490	
10	479	
15	464	130
20	433	
25	391	180
30	348	
35	309	193
40	265	
45	197	152
50	135	
55	92	85
60	68	
65	51	52
70	40	
75	30	32
80	21	
85	9	10
90	0	

#### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	20	5.5'
6'	14	6.6'
7'	10	7.7'
8'	8	8.8'
9'	6	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

#### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	21.8	2.89
6'	14.2	1.90
7'	10.2	1.35
8'	8.5	1.13
9'	6.8	0.90

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

#### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%											
	70	50	30	10	50	10	50	10	50	10	0											
Wall	Zonal cavity method - Effective floor reflectance = 20%																					
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88	88	87	80	77	77	79	71	67	67	60
	2	102	96	90	85	94	84	90	82	87	80	77	77	79	71	67	67	79	70	67	60	60
	3	95	86	79	74	85	73	82	72	79	71	67	67	79	70	67	67	79	70	67	60	60
	4	88	78	70	65	77	64	74	63	72	62	60	60	79	70	67	67	79	70	67	60	60
	5	82	71	63	57	70	57	68	56	66	56	53	53	79	70	67	67	79	70	67	60	60
	6	76	65	57	51	64	51	62	51	61	50	48	48	79	70	67	67	79	70	67	60	60
	7	71	59	52	46	59	46	57	46	56	45	43	43	79	70	67	67	79	70	67	60	60
	8	67	55	47	42	54	42	53	42	52	41	39	39	79	70	67	67	79	70	67	60	60
	9	63	51	43	38	50	38	49	38	48	38	36	36	79	70	67	67	79	70	67	60	60
	10	59	47	40	35	47	35	46	35	45	35	33	33	79	70	67	67	79	70	67	60	60

#### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	356	40.5%
0-40	549	62.4%
0-60	786	89.3%
0-90	880	100.0%

#### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

#### Report: 962GFR


Output lumens:	880 lms	Efficacy:	65.2 lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	2700K
Beam Angle:	83°	CRI:	90min
Input Watts <sup>2</sup> :	13.5W		

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S5R827K7 • 10W LED, 80CRI, 2700K

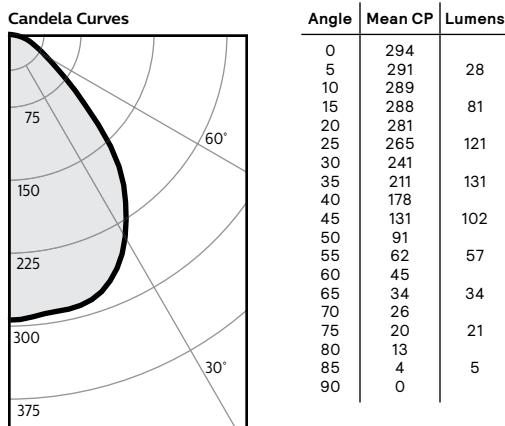

Report: 1054GFR

Output lumens:	581lms	Efficacy:	62.5lm/w
Spacing Criterion:	1.2	CCT <sup>3</sup> :	2700K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	9.3W		

**Single unit data**

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	12	6.0'
6'	8	7.2'
7'	6	8.4'
8'	5	9.6'
9'	4	10.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

**Multiple unit data - RCR 2**

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	24.2	2.77
6'	15.8	1.82
7'	11.3	1.30
8'	9.5	1.08
9'	7.5	0.87

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

**Coefficients of utilization**

Ceiling	80%				70%		50%		30%		0%											
Wall	70	50	30	10	50	10	50	10	50	10	0											
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	105	105	100	95	97	92	88	88	87	80	77	77	79	70	67	67	60
	2	102	96	90	85	94	94	90	82	87	80	77	77	79	71	67	67	79	70	67	60	60
	3	95	86	79	73	84	84	82	72	79	70	67	67	79	70	67	67	79	70	67	60	60
	4	88	78	70	64	76	76	74	63	72	62	60	60	72	62	60	60	72	62	60	60	60
	5	82	71	63	57	70	70	68	56	66	56	53	53	66	56	53	53	66	56	53	53	53
	6	76	64	57	51	64	64	62	50	60	50	48	48	60	50	48	48	60	50	48	48	48
	7	71	59	51	46	58	58	57	45	56	45	43	43	56	45	43	43	56	45	43	43	43
	8	67	54	47	42	54	54	53	41	51	41	39	39	51	41	39	39	51	41	39	39	39
	9	63	50	43	38	50	50	49	38	48	37	36	36	48	37	36	36	48	37	36	36	36
	10	59	47	40	35	46	46	45	34	44	34	33	33	44	34	33	33	44	34	33	33	33


**Zonal lumens & percentages**

Zone	Lumens	%Luminaire
0-30	231	39.7%
0-40	362	62.3%
0-60	521	89.6%
0-90	581	100.0%

**CRI and CCT adjustment factors**

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

## S7R827K10 • 14W LED, 80CRI, 2700K

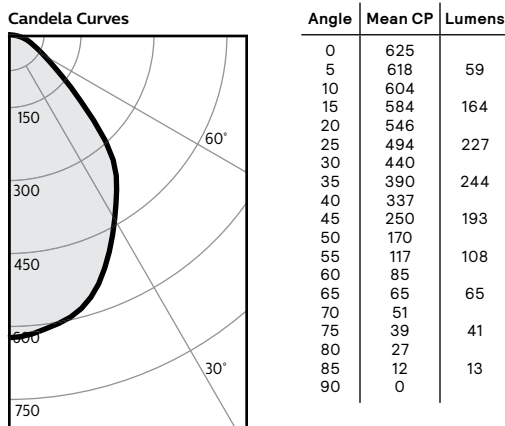

Report: 964GFR

Output lumens:	1113lms	Efficacy:	83.1lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	2700K
Beam Angle:	83°	CRI:	80min
Input Watts <sup>2</sup> :	13.4W		

**Single unit data**

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	25	5.5'
6'	17	6.6'
7'	13	7.7'
8'	10	8.8'
9'	8	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

**Multiple unit data - RCR 2**

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	24.2	3.68
6'	15.8	2.42
7'	11.3	1.73
8'	9.5	1.44
9'	7.5	1.15

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

**Coefficients of utilization**

Ceiling	80%				70%		50%		30%		0%											
Wall	70	50	30	10	50	10	50	10	50	10	0											
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88	88	87	80	77	77	79	71	67	67	60
	2	102	96	90	85	94	84	90	82	87	80	77	77	79	71	67	67	79	70	67	60	60
	3	95	86	79	74	85	73	82	72	79	71	67	67	79	70	67	67	79	70	67	60	60
	4	88	78	70	65	77	64	74	63	72	62	60	60	72	62	60	60	72	62	60	60	60
	5	82	71	63	57	70	57	68	56	66	56	53	53	66	56	53	53	66	56	53	53	53
	6	76	65	57	51	64	51	62	51	61	50	48	48	60	50	48	48	60	50	48	48	48
	7	71	59	52	46	59	46	57	46	56	45	43	43	56	45	43	43	56	45	43	43	43
	8	67	55	47	42	54	42	53	42	52	41	39	39	51	41	39	39	51	41	39	39	39
	9	63	51	43	38	50	38	49	38	48	38	36	36	48	38	36	36	48	38	36	36	36
	10	59	47	40	35	47	35	46	35	45	35	33	33	45	35	33	33	45	35	33	33	33

**Zonal lumens & percentages**

Zone	Lumens	%Luminaire
0-30	449	40.4%
0-40	693	62.3%
0-60	994	89.3%
0-90	1113	100.0%

**CRI and CCT adjustment factors**


90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S5R830K7 • 10W LED, 80CRI, 3000K

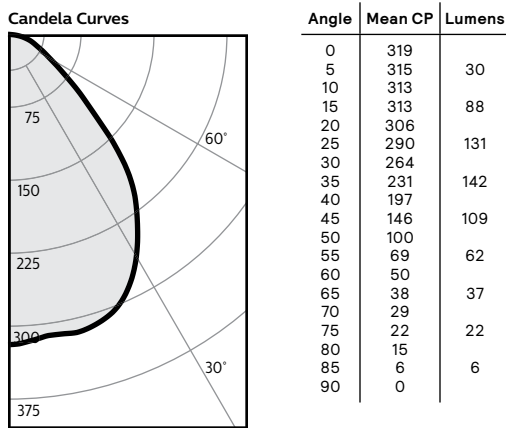

Report: 1055GFR

Output lumens:	628lms	Efficacy:	69.0lm/w
Spacing Criterion:	1.2	CCT <sup>3</sup> :	3000K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	9.1W		

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	13	6.0'
6'	9	7.2'
7'	7	8.4'
8'	5	9.6'
9'	4	10.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	26.2	3.06
6'	17.1	2.01
7'	12.2	1.43
8'	10.2	1.19
9'	8.1	0.96

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	105	98	100	95	97	92	88
	2	102	96	90	85	94	84	90	82	87	80	77
	3	95	86	79	73	84	73	82	72	79	70	67
	4	88	78	70	64	76	64	74	63	72	62	60
	5	82	71	63	57	70	57	68	56	66	56	53
	6	76	64	57	51	64	51	62	50	60	50	48
	7	71	59	51	46	58	46	57	45	56	45	43
	8	67	54	47	42	54	41	53	41	51	41	39
	9	63	50	43	38	50	38	49	38	48	37	36
	10	59	47	40	35	46	35	45	34	44	34	33


### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	249	39.7%
0-40	391	62.3%
0-60	562	89.6%
0-90	628	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

## S7R830K10 • 14W LED, 80CRI, 3000K

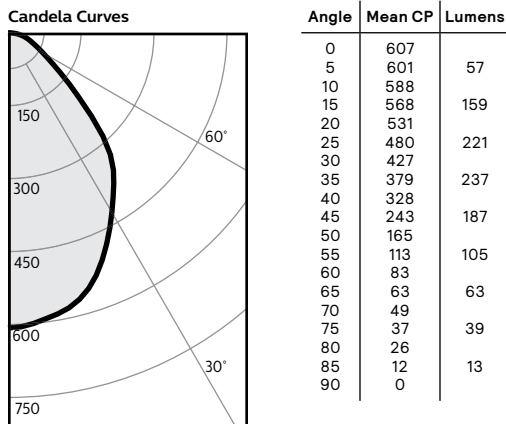

Report: 961GFR

Output lumens:	1081lms	Efficacy:	80.0lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	3000K
Beam Angle:	83°	CRI:	80min
Input Watts <sup>2</sup> :	13.5W		

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	24	5.5'
6'	17	6.6'
7'	12	7.7'
8'	9	8.8'
9'	7	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	26.2	3.55
6'	17.1	2.33
7'	12.2	1.66
8'	10.2	1.39
9'	8.1	1.11

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88
	2	102	96	90	85	94	84	90	82	87	80	77
	3	95	86	79	74	85	73	82	72	79	71	67
	4	88	78	70	65	77	64	74	63	72	62	60
	5	82	71	63	57	70	57	68	56	66	56	53
	6	76	65	57	51	64	51	62	51	61	50	48
	7	71	59	52	46	59	46	57	46	56	45	43
	8	67	55	47	42	54	42	53	42	52	41	39
	9	63	51	43	38	50	38	49	38	48	38	36
	10	59	47	40	35	47	35	46	35	45	35	33

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	437	40.4%
0-40	674	62.3%
0-60	966	89.4%
0-90	1081	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%


1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S5R835K7 • 10W LED, 80CRI, 3500K

### Candela Curves

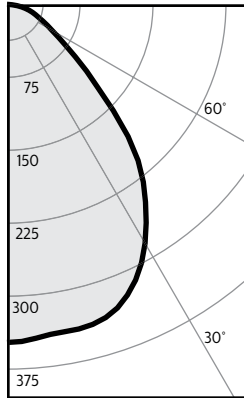

Angle	Mean CP	Lumens
0	347	33
5	344	
10	341	
15	340	96
20	332	
25	312	143
30	283	
35	248	155
40	209	
45	154	119
50	107	
55	74	68
60	53	
65	41	41
70	31	
75	23	25
80	15	
85	5	7
90	0	

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	14	6.0'
6'	10	7.2'
7'	7	8.4'
8'	5	9.6'
9'	4	10.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	28.6	3.34
6'	18.7	2.19
7'	13.3	1.56
8'	11.2	1.30
9'	8.9	1.04

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	111	106	100
	1	111	107	103	100	105	98	100	95	95	92	88
	2	102	96	90	85	94	84	90	82	82	80	77
	3	95	86	79	73	84	73	82	72	72	70	67
	4	88	78	70	64	76	64	74	63	63	62	60
	5	82	71	63	57	70	57	68	56	56	56	53
	6	76	64	57	51	64	51	62	50	50	50	48
	7	71	59	51	46	58	46	57	45	45	45	43
	8	67	54	47	42	54	41	53	41	41	41	39
	9	63	50	43	38	50	38	49	38	38	37	36
	10	59	47	40	35	46	35	45	34	34	34	33

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	272	39.6%
0-40	426	62.2%
0-60	613	89.5%
0-90	685	100.0%

### CRI and CCT adjustment factors


90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

### Report: 1056GFR

Output lumens:	685 lms	Efficacy:	75.3 lm/w
Spacing Criterion:	1.2	CCT <sup>3</sup> :	3500K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	9.1W		

## S7R835K10 • 14W LED, 80CRI, 3500K

### Candela Curves

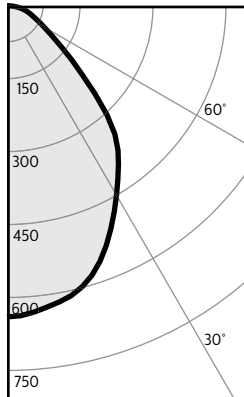

Angle	Mean CP	Lumens
0	639	60
5	632	
10	618	
15	597	167
20	558	
25	505	232
30	449	
35	399	249
40	345	
45	255	197
50	174	
55	120	111
60	88	
65	67	67
70	52	
75	40	42
80	28	
85	12	13
90	0	

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	26	5.5'
6'	18	6.6'
7'	13	7.7'
8'	10	8.8'
9'	8	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	28.6	3.74
6'	18.7	2.45
7'	13.3	1.75
8'	11.2	1.46
9'	8.9	1.17

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88
	2	102	96	90	85	94	84	90	82	87	80	77
	3	95	86	79	74	85	73	82	72	79	71	67
	4	88	78	70	65	77	64	74	63	72	62	60
	5	82	71	63	57	70	57	68	56	66	56	53
	6	76	65	57	51	64	51	62	51	61	50	48
	7	71	59	52	46	59	46	57	46	56	45	43
	8	67	55	47	42	54	42	53	42	52	41	39
	9	63	51	43	38	50	38	49	38	48	38	36
	10	59	47	40	35	47	35	46	35	45	35	33

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	459	40.3%
0-40	708	62.2%
0-60	1016	89.2%
0-90	1139	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

### Report: 965GFR


Output lumens:	1139 lms	Efficacy:	84.4 lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	3500K
Beam Angle:	83°	CRI:	80min
Input Watts <sup>2</sup> :	13.5W		

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S5R840K7 • 10W LED, 80CRI, 4000K

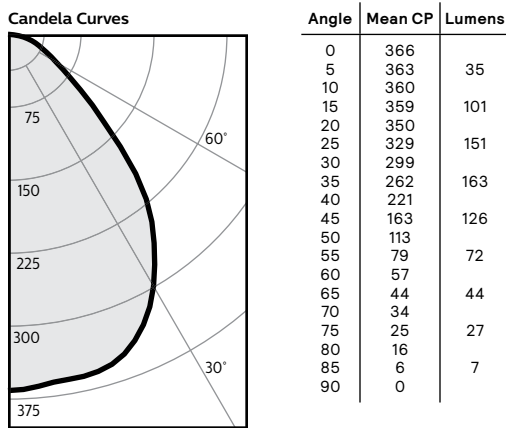

Report: 1057GFR

Output lumens:	726 lms	Efficacy:	79.8lm/w
Spacing Criterion:	1.2	CCT <sup>3</sup> :	4000K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	9.1W		

**Single unit data**

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	15	6.0'
6'	10	7.2'
7'	7	8.4'
8'	6	9.6'
9'	5	10.8'

\* Beam diameter is where foot-candles drop to 50% of maximum.

**Multiple unit data - RCR 2**

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	30.3	3.54
6'	19.8	2.32
7'	14.1	1.66
8'	11.8	1.38
9'	9.4	1.10

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

**Coefficients of utilization**

Ceiling	80%				70%		50%		30%		0%											
Wall	70	50	30	10	50	10	50	10	50	10	0											
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	105	98	100	95	97	92	88	88	88	84	84	82	82	87	80	77	77
	2	102	96	90	85	94	84	90	82	87	80	77	77	77	84	73	82	72	79	70	67	67
	3	95	86	79	73	84	73	82	72	79	70	67	67	67	76	64	74	63	72	62	60	60
	4	88	78	70	64	76	64	74	63	72	62	60	60	60	82	71	63	57	68	56	53	53
	5	82	71	63	57	70	57	68	56	66	56	53	53	53	76	64	57	51	62	50	48	48
	6	76	64	57	51	64	51	62	51	61	50	48	48	48	71	59	51	46	58	46	43	43
	7	71	59	51	46	58	46	57	45	56	45	43	43	43	67	54	47	42	54	41	51	51
	8	67	54	47	42	54	41	53	41	51	41	39	39	39	63	50	43	38	50	38	48	48
	9	63	50	43	38	50	38	49	38	48	37	36	36	36	59	47	40	35	46	35	44	44
	10	59	47	40	35	46	35	45	34	44	34	33	33	33								


**Zonal lumens & percentages**

Zone	Lumens	%Luminaire
0-30	286	39.5%
0-40	450	62.0%
0-60	648	89.3%
0-90	726	100.0%

**CRI and CCT adjustment factors**

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

## S7R840K10 • 14W LED, 90CRI, 2700K

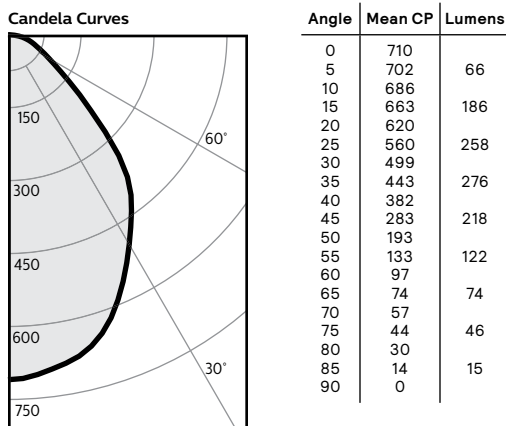

Report: 963GFR

Output lumens:	1262 lms	Efficacy:	94.2lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	4000K
Beam Angle:	83°	CRI:	80min
Input Watts <sup>2</sup> :	13.4W		

**Single unit data**

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	28	5.5'
6'	20	6.6'
7'	14	7.7'
8'	11	8.8'
9'	9	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

**Multiple unit data - RCR 2**

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	30.3	4.17
6'	19.8	2.74
7'	14.1	1.96
8'	11.8	1.63
9'	9.4	1.30

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

**Coefficients of utilization**

Ceiling	80%				70%		50%		30%		0%											
Wall	70	50	30	10	50	10	50	10	50	10	0											
RCR	Zonal cavity method - Effective floor reflectance = 20%																					
Room Cavity Ratio	0	1	2	3	4	5	6	7	8	9	10	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88	88	88	102	96	90	85	94	84	87	80
	2	102	96	90	85	94	84	90	82	87	80	77	77	77	95	86	79	74	85	73	82	72
	3	95	86	79	74	85	73	82	72	79	71	67	67	67	88	78	70	65	77	64	74	63
	4	88	78	70	65	77	64	74	63	72	62	60	60	60	82	71	63	57	70	57	68	56
	5	82	71	63	57	70	57	68	56	66	56	53	53	53	76	65	57	51	64	51	62	51
	6	76	65	57	51	64	51	62	51	61	50	48	48	48	71	59	52	46	59	46	57	46
	7	71	59	52	46	59	46	57	46	56	45	43	43	43	67	55	47	42	54	42	53	42
	8	67	55	47	42	54	42	53	42	52	41	39	39	39	63	51	43	38	50	38	49	38
	9	63	51	43	38	50	38	49	38	48	38	36	36	36	59	47	40	35	47	35	46	35
	10	59	47	40	35	47	35	46	35	45	35	33	33	33								

**Zonal lumens & percentages**

Zone	Lumens	%Luminaire
0-30	510	40.4%
0-40	786	62.3%
0-60	1127	89.3%
0-90	1262	100.0%

**CRI and CCT adjustment factors**

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S10R830K22 • 24W LED, 80CRI, 3000K

Candela Curves	Angle	Mean CP	Lumens
	0	1027	
	5	1017	97
	10	1008	
	15	992	279
	20	947	
	25	871	399
	30	776	
	35	685	429
	40	597	
	45	459	351
	50	313	
	55	223	204
	60	161	
	65	122	122
	70	93	
	75	70	74
	80	46	
	85	20	23
	90	0	

Report: S10R927K22BK

Output lumens:	1977lms	Efficacy:	84.1lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	3000K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	23.5W		

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	41	5.5'
6'	29	6.6'
7'	21	7.7'
8'	16	8.8'
9'	13	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	83.4	1.04
6'	54.8	0.68
7'	39.1	0.49
8'	32.6	0.41
9'	26.1	0.33

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88
	2	102	95	90	85	93	84	90	82	87	80	76
	3	95	86	79	73	84	72	81	71	79	70	67
	4	88	77	70	64	76	63	74	63	71	62	59
	5	82	70	62	56	69	56	67	56	65	55	53
	6	76	64	56	50	63	50	61	50	60	49	47
	7	71	59	51	45	58	45	57	45	55	45	43
	8	66	54	46	41	53	41	52	41	51	41	39
	9	62	50	43	37	49	37	48	37	47	37	35
	10	59	47	39	34	46	34	45	34	44	34	32

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	775	39.2%
0-40	1203	60.9%
0-60	1758	88.9%
0-90	1977	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

## S10R835K22 • 24W LED, 80CRI, 3500K

Candela Curves	Angle	Mean CP	Lumens
	0	1000	
	5	990	94
	10	981	
	15	966	271
	20	922	
	25	847	388
	30	754	
	35	664	416
	40	579	
	45	442	339
	50	300	
	55	212	195
	60	153	
	65	117	117
	70	89	
	75	67	71
	80	44	
	85	20	22
	90	0	

Report: 963GFR

Output lumens:	1913lms	Efficacy:	80.0lm/w
Spacing Criterion:	1.1	CCT <sup>3</sup> :	3500K
Beam Angle:	87°	CRI:	80min
Input Watts <sup>2</sup> :	23.9W		

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	40	5.5'
6'	28	6.6'
7'	20	7.7'
8'	16	8.8'
9'	12	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	80.8	1.06
6'	53.0	0.70
7'	37.9	0.50
8'	31.6	0.41
9'	25.2	0.33

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
	70	50	30	10	50	10	50	10	50	10	0	
Wall	Zonal cavity method - Effective floor reflectance = 20%											
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	104	98	100	95	96	92	88
	2	102	95	90	85	94	84	90	82	87	80	76
	3	95	86	79	73	84	72	81	71	79	70	67
	4	88	77	70	64	76	64	74	63	72	62	59
	5	82	70	62	57	69	56	67	56	65	55	53
	6	76	64	56	51	63	50	62	50	60	50	47
	7	71	59	51	45	58	45	57	45	55	45	43
	8	67	54	47	41	54	41	52	41	51	41	39
	9	62	50	43	38	50	38	49	37	48	37	35
	10	59	47	39	35	46	34	45	34	44	34	32

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	754	39.4%
0-40	1170	61.2%
0-60	1703	89.0%
0-90	1913	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.




# S5R, S7R & S10R SlimSurface LED

Round 5", 7" & 10" apertures

## S10R927K22 • 23W LED, 90CRI, 2700K

### Candela Curves

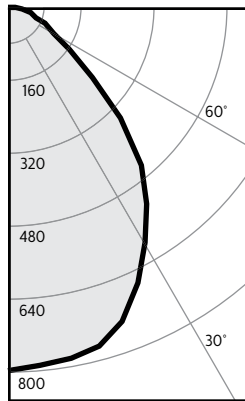

Angle	Mean CP	Lumens
0	794	
5	788	
10	781	75
15	769	
20	732	216
25	669	
30	595	307
35	525	
40	453	328
45	344	
50	238	265
55	162	
60	116	149
65	87	
70	66	87
75	49	
80	32	52
85	13	
90	0	15

### Report: S10R927K22BK

Output lumens:	1493 lms
Spacing Criterion:	1.1
Beam Angle:	86°
Input Watts:	22.8W

Efficacy:	65.5lm/w
CCT <sup>3</sup> :	2700K
CRI:	90min

### Single unit data

Height to Lighted Plane	Initial center beam foot-candles	Beam dia. (ft)*
5'	32	5.5'
6'	22	6.6'
7'	16	7.7'
8'	12	8.8'
9'	10	9.9'

\* Beam diameter is where foot-candles drop to 50% of maximum.

### Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq.ft.
5'	63.3	1.01
6'	41.5	0.66
7'	29.7	0.47
8'	24.7	0.39
9'	19.8	0.32

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

### Coefficients of utilization

Ceiling	80%				70%		50%		30%		0%	
Wall	70	50	30	10	50	10	50	10	50	10	0	
RCR	Zonal cavity method - Effective floor reflectance = 20%											
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100
	1	111	107	103	100	105	98	100	95	97	93	88
	2	103	96	90	85	94	84	90	82	87	80	77
	3	95	86	79	74	85	73	82	72	79	70	67
	4	88	78	70	64	77	64	74	63	72	62	60
	5	82	71	63	57	70	57	68	56	66	56	53
	6	76	65	57	51	64	51	62	50	60	50	48
	7	71	59	51	46	58	46	57	45	56	45	43
	8	67	55	47	42	54	42	53	41	52	41	39
	9	63	51	43	38	50	38	49	38	48	38	36
	10	59	47	40	35	46	35	46	35	45	35	33

### Zonal lumens & percentages

Zone	Lumens	%Luminaire
0-30	598	40.0%
0-40	925	62.0%
0-60	1339	89.7%
0-90	1493	100.0%

### CRI and CCT adjustment factors

90 CRI 2700K = 84%
80 CRI 2700K = 100%
80 CRI 3000K = 100%
80 CRI 3500K = 105%
80 CRI 4000K = 109%

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.
2. Wattage: controlled to within 5%
3. Correlated Color Temperature: within specs as defined in ANSI\_NEMA\_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.



© 2023 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation  
400 Crossing Blvd, Suite 600  
Bridgewater, NJ 08807  
Telephone: 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.