

INSTALLATION INSTRUCTIONS FOR L-907 POWER-TRAC® GRID CEILING OUTLET BOX

NOTE: For use with L-650 Series Track system ONLY

The L907 is designed for use on "Grid Tee Bar" ceiling applications only; where track is supported by "T" bar clip assembly L983 with L650 series track as supporting member for L907 and with L901 Live End Connector; L903 Straight Connector; L904 "L" Angle Connector; L905 "T" Connector; and L906 "X" Connector.

Step 1A: When using the L901, L903, L906 connector, remove plastic cover and steel back plate, discard. Save ¼ lg. mtg. screws.


Step 1B: When using the L904, L905 connector, remove plastic cover, discard. Save ¼ lg. mtg. screws. Do not remove steel back plate.

Step 2: Place the connector over the four (4) positioning tabs on the mounting plate with the knockouts and positioning guides facing down (see illustration) and fasten connector to mounting plate in front with ¼ lg. flat head screws removed with plastic cover. **IMPORTANT.** The Connector must be properly located over the positioning guides. The screws must be tightened so that the mounting plate and connector are tight and flush.

Step 3: Install the connector and mounting plate assembly to track. Conduit connections may be made directly to the mounting plate via one or all of the knockouts provided.

Step 4: The Cover provides one slot for installation on the L-901 Connector. On all other connector series, the slots must be cut or snapped out of the wiring cover side walls. Trim all edges smooth with sharp tool if necessary. Note that the slots are defined on the inside walls of the wiring cover.

Step 5: All wires must be dressed down flush with the top of the connector. The wiring cover is then installed over the connector and mounting plate and fastened to the mounting plate with the four (4) flat head screws provided.

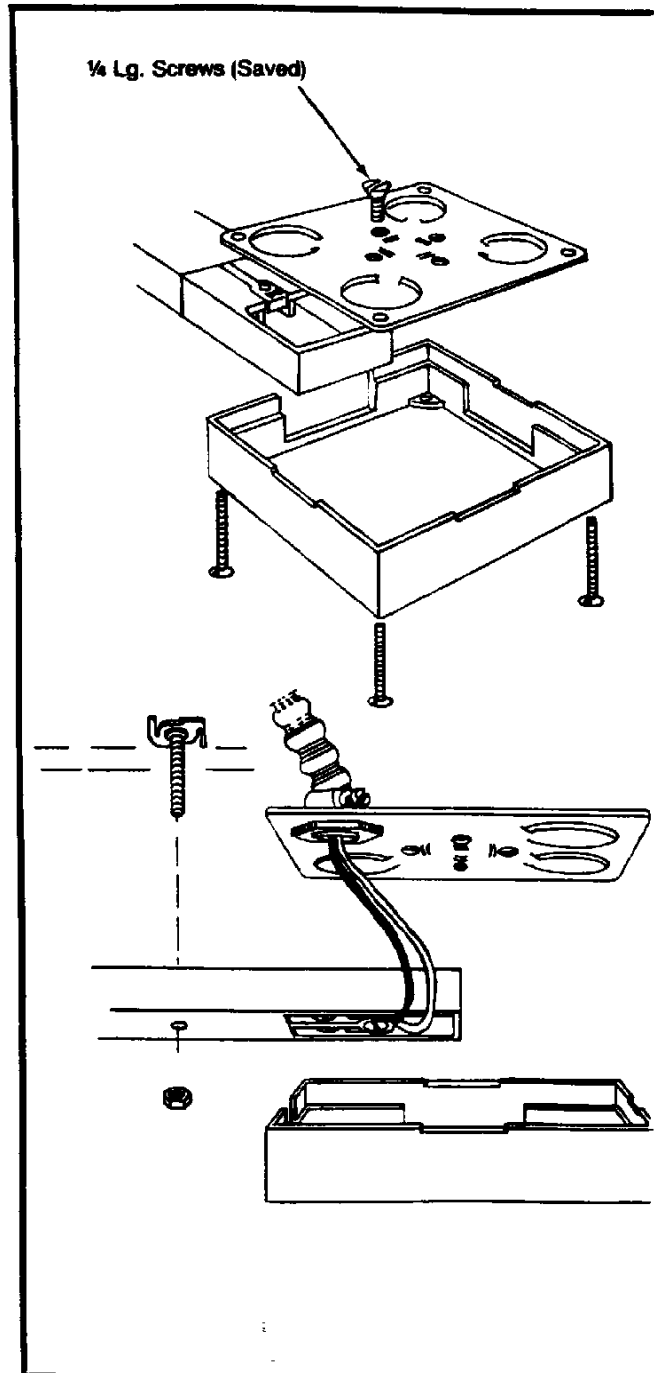

698490