




Warnings

Always make sure the luminaire is detached from the mains socket
 Always make sure the DC cable is detached from the power supply
 Staring at the operating light source may cause eye injury

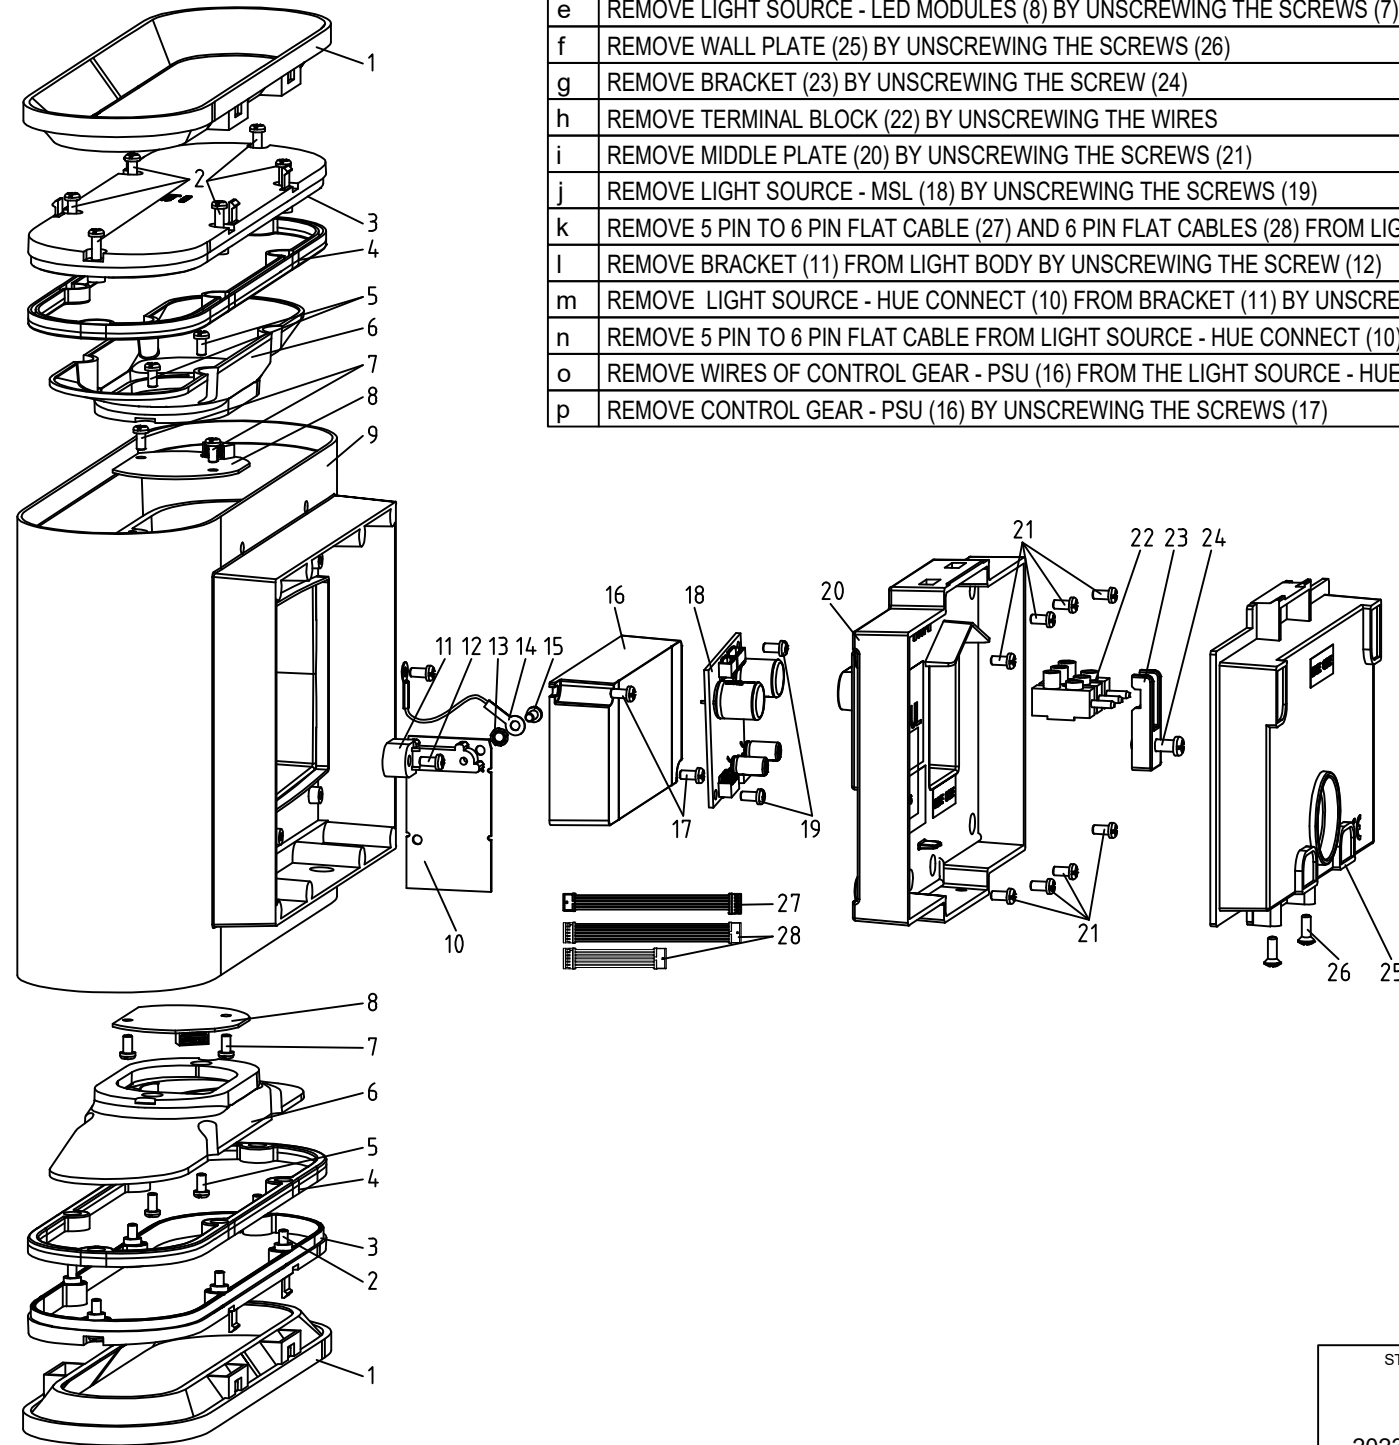

#	Disassemble/dismantle steps	Tools needed
a	REMOVE BEAM RINGS (1)	FLAT HEAD SCREW DRIVER
b	REMOVE DIFFUSER (3) AND GASKET (4) BY UNSCREWING THE SCREWS (2)	CROSS HEAD SCREW DRIVER
c	REMOVE REFLECTOR (6) BY UNSCREWING THE SCREWS (5)	FLAT HEAD SCREW DRIVER
d	REMOVE FLAT CABLES (28) FROM LIGHT SOURCE - LED MODULES (8)	-
e	REMOVE LIGHT SOURCE - LED MODULES (8) BY UNSCREWING THE SCREWS (7)	CROSS HEAD SCREW DRIVER
f	REMOVE WALL PLATE (25) BY UNSCREWING THE SCREWS (26)	CROSS HEAD SCREW DRIVER
g	REMOVE BRACKET (23) BY UNSCREWING THE SCREW (24)	CROSS HEAD SCREW DRIVER
h	REMOVE TERMINAL BLOCK (22) BY UNSCREWING THE WIRES	FLAT HEAD SCREW DRIVER
i	REMOVE MIDDLE PLATE (20) BY UNSCREWING THE SCREWS (21)	CROSS HEAD SCREW DRIVER
j	REMOVE LIGHT SOURCE - MSL (18) BY UNSCREWING THE SCREWS (19)	CROSS HEAD SCREW DRIVER
k	REMOVE 5 PIN TO 6 PIN FLAT CABLE (27) AND 6 PIN FLAT CABLES (28) FROM LIGHT SOURCE - MSL (18)	-
l	REMOVE BRACKET (11) FROM LIGHT BODY BY UNSCREWING THE SCREW (12)	CROSS HEAD SCREW DRIVER
m	REMOVE LIGHT SOURCE - HUE CONNECT (10) FROM BRACKET (11) BY UNSCREWING THE SCREW (15)	CROSS HEAD SCREW DRIVER
n	REMOVE 5 PIN TO 6 PIN FLAT CABLE FROM LIGHT SOURCE - HUE CONNECT (10)	-
o	REMOVE WIRES OF CONTROL GEAR - PSU (16) FROM THE LIGHT SOURCE - HUE CONNECT (10)	FLATHEAD SCREWDRIVER OR WAGO TOOL #2065
p	REMOVE CONTROL GEAR - PSU (16) BY UNSCREWING THE SCREWS (17)	CROSS HEAD SCREW DRIVER

#	COMPONENT	QTY
1	BEAM RING	2
2	SCREW	12
3	DIFFUSER	2
4	GASKET	2
5	SCREW	4
6	REFLECTOR	2
7	SCREW	4
8	LIGHT SOURCE - LED MODULE	2
9	LIGHT BODY	1
10	LIGHT SOURCE - HUE CONNECT	1
11	BRACKET	1
12	SCREW	1
13	WASHER	1
14	WIRE	1
15	SCREW	1
16	CONTROL GEAR - PSU	1
17	SCREW	2
18	LIGHT SOURCE - MSL	1
19	SCREW	2
20	MIDDLE PLATE	1
21	SCREW	8
22	TERMINAL BLOCK	1
23	BRACKET	1
24	SCREW	1
25	WALL PLATE	1
26	SCREW	2
27	5 PIN TO 6 PIN FLAT CABLE	1
28	6 PIN FLAT CABLE	2

SKU	Color	Country
929003665001	BLACK	EU

STATUS	DESCRIPTION	DESIGN ID
2023-10-20	Dymera Hue EU	DOC 12NC
NAME WH	LOCAL PART ID	SH. 1
CHECKED	DATE	SH. A3-P

CONFIDENTIAL, PROPERTY OF: © 2020 Signify Holding