

**DESCRIPTION**

Lampholder utilizes 12V MR16 lamps and provides a very white crisp light. Lampholders are available in Satin White (P) or Matte Black (MB) finishes. Lazer lampholders are compatible with all Halo Power-Trac systems (except 4-Circuit Trac). Ideal for accent and display lighting applications where high coloring rendering and precise beam control are required.

Catalog #	Type
Project	
Comments	
Prepared by	Date

**SPECIFICATION FEATURES**

**A...Electrical Quick Lock Adapter/Transformer**

Polycarbonate casing. Attaches electrically and mechanically anywhere along track. Visual polarity line assures proper grounding. Two position conductor allows use in single circuit and either circuit of two circuit track. All solid-state components lower 120V line voltage to lamp operating voltage.

**B...Arm**

Matching polycarbonate arm allows lampholder to rotate 338° and adjust vertically from 0° to 90°. Constant tension pivot design holds desired aiming angle.

**C...Body**

Deep drawn steel lamp housing with vents in rear keep socket temperatures within design limits.

**D...Baffle**

Die cast aluminum black baffle with lamp retention spring pulls out for relamping.


**Listings**

UL/CSA listed for use with Halo and Lazer-by-Halo track and track systems



**LZR406**

**12V MR16  
STEP CYLINDER  
LAMPHOLDER**  
Lazer by Halo

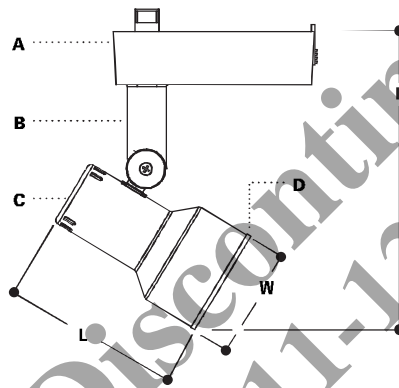

Discontinued 11-12-2023

**ORDERING INFORMATION**

SAMPLE NUMBER: LZR406P

**Lampholders**


--

LZR406=12V MR16 Step Cylinder

**Finishes**

--

P=Satin White  
MB=Satin Black



**LZR406**

For use with:  
50W Max. 12V MR16  
W=2 1/2" [63mm]  
L =3 7/8" [98mm]  
E =6 3/4 " [171mm]

**ENERGY DATA**

Power Factor: >.90  
Input Watts: <50  
Input Amps: .45 Max.  
THD: <30%

ADV021813

9/04  
TAB: Lazer Lampholders and Track  
Sheet 13

Note: Specifications and Dimensions subject to change without notice.