


ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

GreenSpace

DN46x, DN47x, TT150-TT200

Signify N.V.

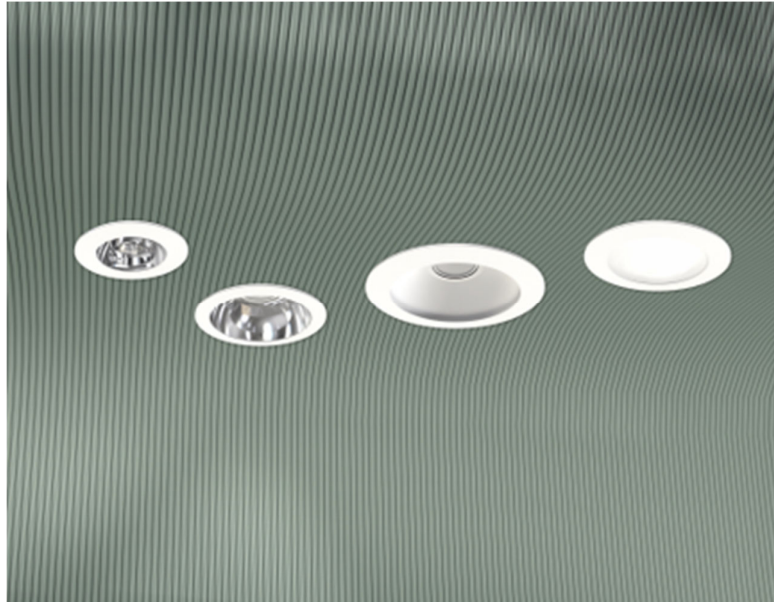

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Lighting
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

GREENSPACE DN46X, DN47X, TT150-TT200

PRODUCT

Product name	GreenSpace
Additional labels	TC TT200 20S/840 PSU-E OC WH281
Product reference	912500107689
Place of production	Europe
Period for data	2023
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.661 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	1.13E+01
GWP-total, A1-A3 (kgCO ₂ e)	1.09E+01
Secondary material, inputs (%)	13.1
Secondary material, outputs (%)	47.0
Total energy use, A1-A3 (kWh)	51.2
Total water use, A1-A3 (m ³ e)	1.17E-01



PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Introducing Signify, the world leader in lighting solutions for professionals, consumers, and the Internet of Things. We are excited to present our PHILIPS MY CREATION brand, which provides REMARKABLE LIGHTING that is SUSTAINABLY PRINTED. With PHILIPS MY CREATION, you can create ambiances that set your space apart. Our amazing shapes and unique textures, enabled by cutting-edge 3D printing technology, create memorable experiences. And the best part? We use waste, recycled and bio-circular materials, to create mesmerizing new lights.

For more information please visit:

[Philips MyCreation Professional Lighting Solutions](#)

PRODUCT DESCRIPTION

A Philips 3D printed downlight is your answer to a fast and easy renovation. With a 100% guaranteed fit, our 3D printed downlights save you frustration, as well as money, right from the start. We print a complete and 100% fitting LED downlight, so you don't need adaptor rings to fit the ceiling anymore

- Stop wasting time searching in catalogues for downlights & adaptor rings
- Faster installation - save money - 100% guaranteed fit – no adaptor rings needed
- Looks great and no double rings with colour differences on the ceiling

Product family: GreenSpace

Types covered by this EPD: DN46x, DN47x, TT150-TT200.

Type selected for this EPD: TC TT200 20S/840 PSU-E OC WH281

GREENSPACE DN46X, DN47X, TT150-TT200

Housing & trim made of 65% post-industrial recycled material

Luminous flux: 2032 lm

System power: 15,1 W

Light color: Light Color 4000K | CRI 80+

Driver options: PSU, DALI dimming, WIA Interact system wireless

For more information, please visit:

[Downlights - GreenSpace - Philips MyCreation Professional Lighting Solutions](#)

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	QUANTITY , kg	Recycled %	Material origin
Ferrous metals (Steel)	0.009	0	EU
Non-ferrous metals (Aluminium)	0.080	0	EU
Plastics & rubbers	0.446	38	EU
Electronic and electrical equipment (LED, Driver)	0.125	0	EU, China

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.127

**FUNCTIONAL UNIT AND SERVICE LIFE**

Declared unit	1 Unit
Mass per declared unit	0.661 kg
Functional unit	2032 lumens over 50000 hours
Reference service life	50000

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation distance is defined according to the PCR. The average distance of transportation from suppliers in Europe to manufacturing sites in Europe and from suppliers in Asia to manufacturing sites in Asia was assumed to be 2000 km by lorry. In the case of intercontinental

transportation, a conservative average distance of 20000 km by a container ship (sea) was assumed. The same applies to distances from manufacturing sites to customers. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe's electricity grid mix (B6). Impacts due to electricity production include direct emissions to air, transformation, and transmission losses. The non-functional parts that are replaced are disposed and sent to waste treatment in the same module. Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

MANUFACTURING PROCESS

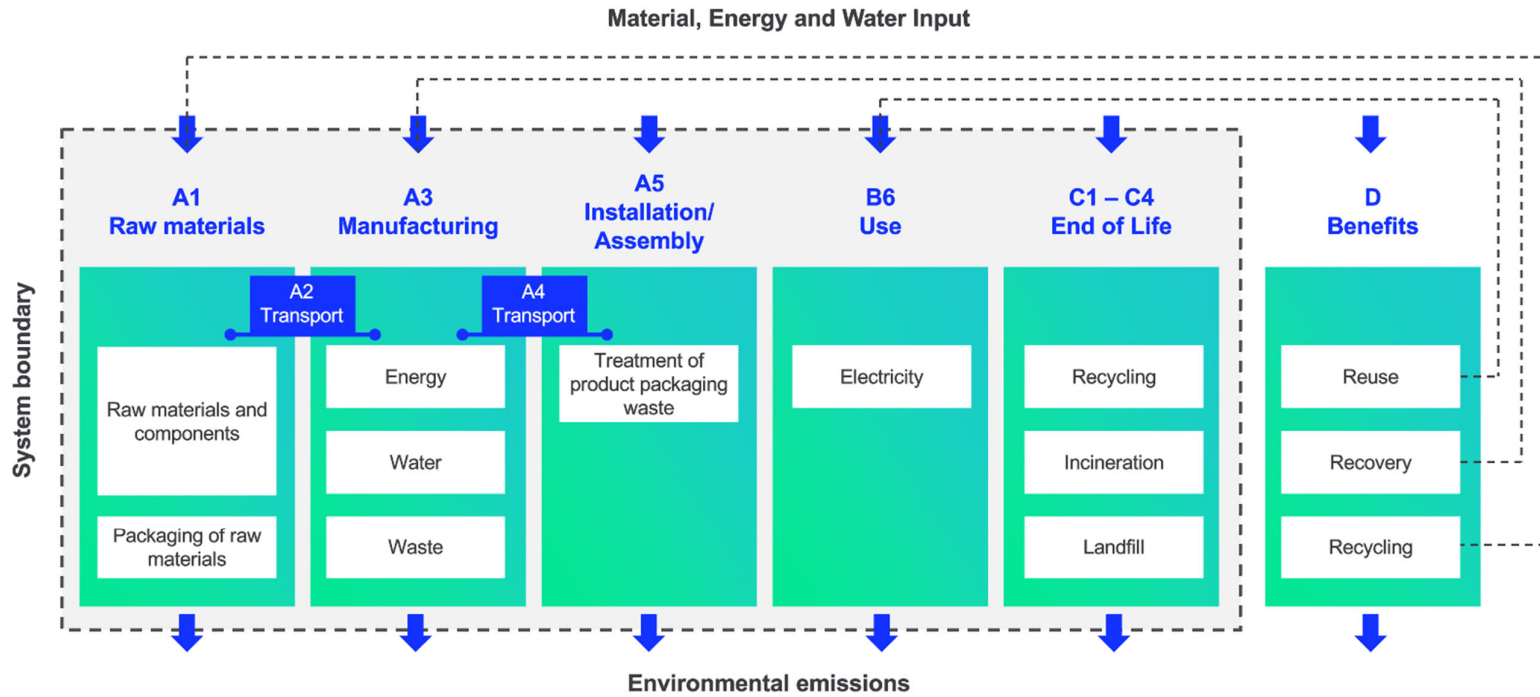

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.



ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	8.89E+00	1.83E-01	1.80E+00	1.09E+01	1.83E-01	4.65E-01	MNR	MNR	MNR	MNR	MNR	2.99E+02	MNR	0.00E+00	1.10E-02	5.44E-01	2.92E-01	-2.16E+00
GWP – fossil	kg CO ₂ e	8.86E+00	1.83E-01	2.25E+00	1.13E+01	1.83E-01	8.25E-03	MNR	MNR	MNR	MNR	MNR	2.98E+02	MNR	0.00E+00	1.10E-02	5.44E-01	2.92E-01	-2.16E+00
GWP – biogenic	kg CO ₂ e	7.91E-03	0.00E+00	-4.57E-01	-4.49E-01	7.08E-05	4.57E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-2.58E-03
GWP – LULUC	kg CO ₂ e	1.30E-02	7.57E-05	3.26E-03	1.63E-02	6.75E-05	8.24E-06	MNR	MNR	MNR	MNR	MNR	6.98E-01	MNR	0.00E+00	4.06E-06	1.84E-05	6.22E-06	-1.23E-03
Ozone depletion pot.	kg CFC ₁₁ e	5.08E-07	4.14E-08	2.31E-07	7.80E-07	4.21E-08	9.08E-10	MNR	MNR	MNR	MNR	MNR	1.52E-05	MNR	0.00E+00	2.53E-09	1.63E-09	1.37E-09	-5.76E-08
Acidification potential	mol H ⁺ e	6.68E-02	1.41E-03	9.03E-03	7.72E-02	7.75E-04	5.86E-05	MNR	MNR	MNR	MNR	MNR	1.70E+00	MNR	0.00E+00	4.66E-05	1.82E-04	8.64E-05	-2.60E-02
EP-freshwater ²⁾	kg Pe	1.21E-03	1.39E-06	6.55E-05	1.28E-03	1.50E-06	2.25E-07	MNR	MNR	MNR	MNR	MNR	3.16E-02	MNR	0.00E+00	9.02E-08	5.56E-07	1.34E-07	-1.36E-04
EP-marine	kg Ne	9.20E-03	3.82E-04	2.05E-03	1.16E-02	2.30E-04	2.21E-04	MNR	MNR	MNR	MNR	MNR	2.26E-01	MNR	0.00E+00	1.39E-05	6.85E-05	5.97E-05	-2.39E-03
EP-terrestrial	mol Ne	1.02E-01	4.23E-03	1.79E-02	1.24E-01	2.54E-03	1.37E-04	MNR	MNR	MNR	MNR	MNR	2.57E+00	MNR	0.00E+00	1.53E-04	7.19E-04	3.83E-04	-2.84E-02
POCP (“smog”) ³⁾	kg NMVOCe	3.61E-02	1.23E-03	5.63E-03	4.29E-02	8.13E-04	1.10E-04	MNR	MNR	MNR	MNR	MNR	7.04E-01	MNR	0.00E+00	4.89E-05	1.77E-04	1.02E-04	-8.18E-03
ADP-minerals & metals ⁴⁾	kg Sbe	8.28E-04	4.07E-07	7.13E-05	9.00E-04	4.29E-07	7.92E-08	MNR	MNR	MNR	MNR	MNR	2.79E-03	MNR	0.00E+00	2.58E-08	3.92E-07	3.42E-08	-2.70E-04
ADP-fossil resources	MJ	1.27E+02	2.69E+00	3.28E+01	1.62E+02	2.75E+00	1.00E-01	MNR	MNR	MNR	MNR	MNR	6.35E+03	MNR	0.00E+00	1.65E-01	2.03E-01	1.13E-01	-2.21E+01
Water use ⁵⁾	m ³ e depr.	3.69E+00	1.16E-02	1.14E+00	4.84E+00	1.23E-02	1.38E-03	MNR	MNR	MNR	MNR	MNR	1.74E+02	MNR	0.00E+00	7.40E-04	2.32E-02	1.20E-02	-2.81E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.



ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	5.23E-07	1.92E-08	8.67E-08	6.29E-07	2.11E-08	2.12E-09	MNR	MNR	MNR	MNR	MNR	5.60E-06	MNR	0.00E+00	1.27E-09	1.22E-09	7.85E-10	-1.67E-07
Ionizing radiation ⁶⁾	kBq U235e	7.04E-01	1.28E-02	7.63E-02	7.93E-01	1.31E-02	6.20E-04	MNR	MNR	MNR	MNR	MNR	1.72E+02	MNR	0.00E+00	7.88E-04	1.31E-03	4.69E-04	-1.52E-01
Ecotoxicity (freshwater)	CTUe	5.53E+02	2.35E+00	5.93E+01	6.14E+02	2.47E+00	1.49E+00	MNR	MNR	MNR	MNR	MNR	4.32E+03	MNR	0.00E+00	1.49E-01	1.44E+00	8.18E+00	-1.07E+02
Human toxicity, cancer	CTUh	1.67E-08	6.68E-11	1.42E-09	1.82E-08	6.07E-11	2.05E-11	MNR	MNR	MNR	MNR	MNR	1.41E-07	MNR	0.00E+00	3.65E-12	5.55E-11	2.82E-10	-1.91E-09
Human tox. non-cancer	CTUh	5.95E-07	2.26E-09	5.13E-08	6.48E-07	2.45E-09	6.15E-10	MNR	MNR	MNR	MNR	MNR	4.65E-06	MNR	0.00E+00	1.47E-10	2.20E-09	1.85E-08	-1.85E-07
SQP ⁷⁾	-	4.33E+01	2.82E+00	1.60E+01	6.21E+01	3.17E+00	1.25E-01	MNR	MNR	MNR	MNR	MNR	1.15E+03	MNR	0.00E+00	1.91E-01	1.10E-01	1.59E-01	-9.20E+00

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	9.22E+00	2.91E-02	2.76E+01	3.69E+01	3.10E-02	6.03E-03	MNR	MNR	MNR	MNR	MNR	1.29E+03	MNR	0.00E+00	1.86E-03	1.78E-02	3.53E-03	-1.65E+00
Renew. PER as material	MJ	0.00E+00	0.00E+00	4.00E+00	4.00E+00	0.00E+00	-4.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of renew. PER	MJ	9.22E+00	2.91E-02	3.16E+01	4.09E+01	3.10E-02	-3.99E+00	MNR	MNR	MNR	MNR	MNR	1.29E+03	MNR	0.00E+00	1.86E-03	1.78E-02	3.53E-03	-1.65E+00
Non-re. PER as energy	MJ	1.12E+02	2.69E+00	3.26E+01	1.47E+02	2.75E+00	1.00E-01	MNR	MNR	MNR	MNR	MNR	6.34E+03	MNR	0.00E+00	1.65E-01	2.03E-01	1.14E-01	-2.21E+01
Non-re. PER as material	MJ	1.46E+01	0.00E+00	3.24E-02	1.46E+01	0.00E+00	-3.24E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	-6.59E+00	6.59E+00	0.00E+00
Total use of non-re. PER	MJ	1.27E+02	2.69E+00	3.26E+01	1.62E+02	2.75E+00	6.76E-02	MNR	MNR	MNR	MNR	MNR	6.34E+03	MNR	0.00E+00	1.65E-01	-6.39E+00	6.48E+00	-2.21E+01
Secondary materials	kg	8.64E-02	7.99E-04	3.27E-01	4.14E-01	7.63E-04	1.16E-04	MNR	MNR	MNR	MNR	MNR	6.54E-01	MNR	0.00E+00	4.59E-05	1.35E-04	1.30E-04	5.39E-02
Renew. secondary fuels	MJ	9.52E-03	7.10E-06	2.26E-02	3.21E-02	7.70E-06	9.18E-07	MNR	MNR	MNR	MNR	MNR	5.30E-03	MNR	0.00E+00	4.63E-07	8.01E-06	2.52E-06	-4.51E-04



Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	8.91E-02	3.30E-04	2.73E-02	1.17E-01	3.56E-04	6.42E-05	MNR	MNR	MNR	MNR	MNR	5.46E+00	MNR	0.00E+00	2.14E-05	8.49E-04	4.52E-04	-1.09E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.08E+00	3.58E-03	1.09E-01	1.20E+00	3.64E-03	4.91E-04	MNR	MNR	MNR	MNR	MNR	2.28E+01	MNR	0.00E+00	2.19E-04	7.35E-04	1.13E-02	-2.68E-01
Non-hazardous waste	kg	1.62E+01	5.57E-02	2.06E+00	1.83E+01	5.99E-02	1.32E-01	MNR	MNR	MNR	MNR	MNR	1.44E+03	MNR	0.00E+00	3.60E-03	2.44E-01	3.40E-01	-7.88E+00
Radioactive waste	kg	1.91E-04	1.81E-05	3.37E-05	2.43E-04	1.84E-05	2.25E-07	MNR	MNR	MNR	MNR	MNR	4.62E-02	MNR	0.00E+00	1.11E-06	3.55E-07	0.00E+00	-5.14E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	8.55E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	1.15E-01	1.15E-01	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	4.95E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930#

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	8.58E+00	1.81E-01	2.24E+00	1.10E+01	1.81E-01	2.02E-01	MNR	MNR	MNR	MNR	MNR	2.95E+02	MNR	0.00E+00	1.09E-02	5.43E-01	2.88E-01	-2.11E+00
Ozone depletion Pot.	kg CFC ₁₁ e	4.79E-07	3.28E-08	1.99E-07	7.11E-07	3.33E-08	7.32E-10	MNR	MNR	MNR	MNR	MNR	1.31E-05	MNR	0.00E+00	2.01E-09	1.43E-09	1.15E-09	-4.84E-08
Acidification	kg SO ₂ e	5.65E-02	1.12E-03	7.35E-03	6.50E-02	6.02E-04	4.74E-05	MNR	MNR	MNR	MNR	MNR	1.45E+00	MNR	0.00E+00	3.62E-05	1.36E-04	6.29E-05	-2.26E-02



Eutrophication	kg PO ₄ ³ e	2.74E-02	1.86E-04	2.97E-03	3.06E-02	1.37E-04	4.02E-04	MNR	MNR	MNR	MNR	MNR	1.11E+00	MNR	0.00E+00	8.25E-06	8.21E-05	1.27E-03	-5.71E-03
POCP ("smog")	kg C ₂ H ₄ e	4.74E-03	3.57E-05	4.60E-04	5.23E-03	2.35E-05	4.53E-05	MNR	MNR	MNR	MNR	MNR	5.91E-02	MNR	0.00E+00	1.41E-06	3.83E-06	4.65E-06	-1.01E-03
ADP-elements	kg Sbe	8.22E-04	3.95E-07	7.09E-05	8.93E-04	4.15E-07	7.84E-08	MNR	MNR	MNR	MNR	MNR	2.78E-03	MNR	0.00E+00	2.50E-08	3.81E-07	2.84E-08	-2.70E-04
ADP-fossil	MJ	1.23E+02	2.69E+00	3.28E+01	1.59E+02	2.75E+00	1.00E-01	MNR	MNR	MNR	MNR	MNR	6.34E+03	MNR	0.00E+00	1.65E-01	2.03E-01	1.13E-01	-2.21E+01

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (S_I), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1 Light management functions (EPD Hub aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$4. \text{ Scaled Impact} = GWP_{case} * TSF$$



Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

PFC	Lamp family	Driver type	Module colour	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)				
								NC	DD	PS	DD+PS	NC	DD	PS	DD+PS	
GreenSpace TT150-TT200 & DN46x, DN47x	7S	PSU-E	830	729	6.5	112	0.43	0.43	N/A	N/A	N/A	128.7	N/A	N/A	N/A	
			840	759	6.5	116	0.43	0.43	N/A	N/A	N/A	128.7	N/A	N/A	N/A	
			PW930	729	6.4	113	0.42	0.42	N/A	N/A	N/A	126.7	N/A	N/A	N/A	
		PW940	774	6.5	120	0.43	0.43	N/A	N/A	N/A	128.7	N/A	N/A	N/A		
		PSD-E	830	729	6.1	120	0.40	0.40	0.30	0.30	0.22	120.8	90.6	90.6	66.4	
			840	759	6.1	124	0.40	0.40	0.30	0.30	0.22	120.8	90.6	90.6	66.4	
	PW930		729	6	121	0.40	0.40	0.30	0.30	0.22	118.8	89.1	89.1	65.3		
	PW940	774	6.1	128	0.40	0.40	0.30	0.30	0.22	120.8	90.6	90.6	66.4			
	11S	PSU-E	830	1195	9.7	123	0.64	0.64	N/A	N/A	N/A	192.1	N/A	N/A	N/A	
			840	1246	9.7	128	0.64	0.64	N/A	N/A	N/A	192.1	N/A	N/A	N/A	
			PW930	1171	9.7	121	0.64	0.64	N/A	N/A	N/A	192.1	N/A	N/A	N/A	
		PW940	1246	9.7	129	0.64	0.64	N/A	N/A	N/A	192.1	N/A	N/A	N/A		
		PSD-E	830	1195	10	120	0.66	0.66	0.50	0.50	0.36	198.0	148.5	148.5	108.9	
			840	1246	10	125	0.66	0.66	0.50	0.50	0.36	198.0	148.5	148.5	108.9	
			PW930	1171	9.9	118	0.66	0.66	0.49	0.49	0.36	196.0	147.0	147.0	107.8	
		PW940	1246	9.9	126	0.66	0.66	0.49	0.49	0.36	196.0	147.0	147.0	107.8		
		WIA-E	830	1195	11	108	0.73	0.73	0.55	0.55	0.40	217.8	163.4	163.4	119.8	
			840	1246	11	113	0.73	0.73	0.55	0.55	0.40	217.8	163.4	163.4	119.8	
			PW930	1171	10.9	107	0.72	0.72	0.54	0.54	0.40	215.8	161.9	161.9	118.7	
		PW940	1246	11	114	0.73	0.73	0.55	0.55	0.40	217.8	163.4	163.4	119.8		
	20S	PSU-E	830	1920	15	128	0.99	0.99	N/A	N/A	N/A	297.0	N/A	N/A	N/A	
			840	2032	15.1	135	1.00	1.00	N/A	N/A	N/A	299.0	N/A	N/A	N/A	
			PW930	2034	16.7	122	1.11	1.11	N/A	N/A	N/A	330.7	N/A	N/A	N/A	
		PW940	1953	14.9	131	0.99	0.99	N/A	N/A	N/A	295.0	N/A	N/A	N/A		
		PSD-E	830	1920	15	128	0.99	0.99	0.75	0.75	0.55	297.0	222.8	222.8	163.4	
			840	2032	15.1	135	1.00	1.00	0.75	0.75	0.55	299.0	224.3	224.3	164.5	
			PW930	2034	16.7	122	1.11	1.11	0.83	0.83	0.61	330.7	248.0	248.0	181.9	
		PW940	1953	14.9	131	0.99	0.99	0.74	0.74	0.54	295.0	221.3	221.3	162.3		
		WIA-E	830	1920	15.7	122	1.04	1.04	0.78	0.78	0.57	310.9	233.2	233.2	171.0	
			840	2032	15.8	129	1.05	1.05	0.78	0.78	0.58	312.9	234.6	234.6	172.1	
			PW930	2034	17.5	116	1.16	1.16	0.87	0.87	0.64	346.5	259.9	259.9	190.6	
		PW940	1953	15.7	125	1.04	1.04	0.78	0.78	0.57	310.9	233.2	233.2	171.0		
		IA4 / IA5	830	1911	17.1	112	1.13	1.13	0.85	0.85	0.62	338.6	254.0	254.0	186.2	
			840	2021	17.1	118	1.13	1.13	0.85	0.85	0.62	338.6	254.0	254.0	186.2	
			PW930	1818	17.1	106	1.13	1.13	0.85	0.85	0.62	338.6	254.0	254.0	186.2	
		PW940	1935	17.1	113	1.13	1.13	0.85	0.85	0.62	338.6	254.0	254.0	186.2		
		30S	PSU-E	830	2789	22.7	123	1.50	1.50	N/A	N/A	N/A	449.5	N/A	N/A	N/A
				840	2955	22.8	130	1.51	1.51	N/A	N/A	N/A	451.5	N/A	N/A	N/A
	PW930			2684	22.8	118	1.51	1.51	N/A	N/A	N/A	451.5	N/A	N/A	N/A	



			PW940	2854	22.7	125	1.50	1.50	N/A	N/A	N/A	449.5	N/A	N/A	N/A	
			PSD-E	830	2789	22.7	123	1.50	1.50	1.13	1.13	0.83	449.5	337.1	337.1	247.2
				840	2955	22.8	130	1.51	1.51	1.13	1.13	0.83	451.5	338.6	338.6	248.3
				PW930	2684	22.8	118	1.51	1.51	1.13	1.13	0.83	451.5	338.6	338.6	248.3
				PW940	2854	22.7	125	1.50	1.50	1.13	1.13	0.83	449.5	337.1	337.1	247.2
			WIA-E	830	2789	23.3	120	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				840	2955	23.3	127	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				PW930	2684	23.3	115	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				PW940	2854	23.3	123	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
			IA4 / IA5	830	2492	23.3	107	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				840	2640	23.3	113	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				PW930	2399	23.3	103	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8
				PW940	2550	23.3	110	1.54	1.54	1.16	1.16	0.85	461.4	346.0	346.0	253.8

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

4. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$SI_{PEP} = Scaled\ GWP * \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$



As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

PFC	Lamp family	Module color	Driver type	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
								NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
GreenSpace TT150-TT200 & DN46x, DN47x	7S	PSU-E	830	729	6.5	112	0.43	0.43	N/A	N/A	N/A	123.6	N/A	N/A	N/A
			840	759	6.5	116	0.43	0.43	N/A	N/A	N/A	118.7	N/A	N/A	N/A
			PW930	729	6.4	113	0.42	0.42	N/A	N/A	N/A	121.7	N/A	N/A	N/A
			PW940	774	6.5	120	0.43	0.43	N/A	N/A	N/A	116.4	N/A	N/A	N/A
		PSD-E	830	729	6.1	120	0.40	0.40	0.30	0.30	0.22	116.0	87.0	87.0	63.8
			840	759	6.1	124	0.40	0.40	0.30	0.30	0.22	111.4	83.5	83.5	61.3
			PW930	729	6	121	0.40	0.40	0.30	0.30	0.22	114.1	85.6	85.6	62.7
			PW940	774	6.1	128	0.40	0.40	0.30	0.30	0.22	109.2	81.9	81.9	60.1
	11S	PSU-E	830	1195	9.7	123	0.64	0.64	N/A	N/A	N/A	112.5	N/A	N/A	N/A
			840	1246	9.7	128	0.64	0.64	N/A	N/A	N/A	107.9	N/A	N/A	N/A
			PW930	1171	9.7	121	0.64	0.64	N/A	N/A	N/A	114.8	N/A	N/A	N/A
			PW940	1246	9.7	129	0.64	0.64	N/A	N/A	N/A	107.9	N/A	N/A	N/A
		PSD-E	830	1195	10	120	0.66	0.66	0.50	0.50	0.36	116.0	87.0	87.0	63.8
			840	1246	10	125	0.66	0.66	0.50	0.50	0.36	111.2	83.4	83.4	61.2
			PW930	1171	9.9	118	0.66	0.66	0.49	0.49	0.36	117.2	87.9	87.9	64.5
			PW940	1246	9.9	126	0.66	0.66	0.49	0.49	0.36	110.1	82.6	82.6	60.6
	WIA-E	830	1195	11	108	0.73	0.73	0.55	0.55	0.40	127.6	95.7	95.7	70.2	
		840	1246	11	113	0.73	0.73	0.55	0.55	0.40	122.4	91.8	91.8	67.3	
		PW930	1171	10.9	107	0.72	0.72	0.54	0.54	0.40	129.0	96.8	96.8	71.0	
		PW940	1246	11	114	0.73	0.73	0.55	0.55	0.40	122.4	91.8	91.8	67.3	
	20S	PSU-E	830	1920	15	128	0.99	0.99	N/A	N/A	N/A	108.3	N/A	N/A	N/A
			840	2032	15.1	135	1.00	1.00	N/A	N/A	N/A	103.0	N/A	N/A	N/A
			PW930	2034	16.7	122	1.11	1.11	N/A	N/A	N/A	113.8	N/A	N/A	N/A
		PSD-E	PW940	1953	14.9	131	0.99	0.99	N/A	N/A	N/A	105.7	N/A	N/A	N/A
830			1920	15	128	0.99	0.99	0.75	0.75	0.55	108.3	81.2	81.2	59.6	



30S	WIA-E	840	2032	15.1	135	1.00	1.00	0.75	0.75	0.55	103.0	77.3	77.3	56.7
		PW930	2034	16.7	122	1.11	1.11	0.83	0.83	0.61	113.8	85.4	85.4	62.6
		PW940	1953	14.9	131	0.99	0.99	0.74	0.74	0.54	105.7	79.3	79.3	58.2
		830	1920	15.7	122	1.04	1.04	0.78	0.78	0.57	113.3	85.0	85.0	62.3
		840	2032	15.8	129	1.05	1.05	0.78	0.78	0.58	107.8	80.8	80.8	59.3
		PW930	2034	17.5	116	1.16	1.16	0.87	0.87	0.64	119.3	89.4	89.4	65.6
		PW940	1953	15.7	125	1.04	1.04	0.78	0.78	0.57	111.4	83.6	83.6	61.3
		830	1911	17.1	112	1.13	1.13	0.85	0.85	0.62	124.0	93.0	93.0	68.2
		840	2021	17.1	118	1.13	1.13	0.85	0.85	0.62	117.3	88.0	88.0	64.5
	IA4 / IA5	PW930	1818	17.1	106	1.13	1.13	0.85	0.85	0.62	130.4	97.8	97.8	71.7
		PW940	1935	17.1	113	1.13	1.13	0.85	0.85	0.62	122.5	91.9	91.9	67.4
		830	2789	22.7	123	1.50	1.50	N/A	N/A	N/A	112.8	N/A	N/A	N/A
	PSU-E	840	2955	22.8	130	1.51	1.51	N/A	N/A	N/A	106.9	N/A	N/A	N/A
		PW930	2684	22.8	118	1.51	1.51	N/A	N/A	N/A	117.7	N/A	N/A	N/A
		PW940	2854	22.7	125	1.50	1.50	N/A	N/A	N/A	110.2	N/A	N/A	N/A
		830	2789	22.7	123	1.50	1.50	1.13	1.13	0.83	112.8	84.6	84.6	62.0
	PSD-E	840	2955	22.8	130	1.51	1.51	1.13	1.13	0.83	106.9	80.2	80.2	58.8
		PW930	2684	22.8	118	1.51	1.51	1.13	1.13	0.83	117.7	88.3	88.3	64.8
		PW940	2854	22.7	125	1.50	1.50	1.13	1.13	0.83	110.2	82.7	82.7	60.6
		830	2789	23.3	120	1.54	1.54	1.16	1.16	0.85	115.8	86.8	86.8	63.7
	WIA-E	840	2955	23.3	127	1.54	1.54	1.16	1.16	0.85	109.3	82.0	82.0	60.1
		PW930	2684	23.3	115	1.54	1.54	1.16	1.16	0.85	120.3	90.2	90.2	66.2
		PW940	2854	23.3	123	1.54	1.54	1.16	1.16	0.85	113.2	84.9	84.9	62.2
		830	2492	23.3	107	1.54	1.54	1.16	1.16	0.85	129.6	97.2	97.2	71.3
	IA4 / IA5	840	2640	23.3	113	1.54	1.54	1.16	1.16	0.85	122.3	91.7	91.7	67.3
		PW930	2399	23.3	103	1.54	1.54	1.16	1.16	0.85	134.6	101.0	101.0	74.0
		PW940	2550	23.3	110	1.54	1.54	1.16	1.16	0.85	126.7	95.0	95.0	69.7
		830	2492	23.3	107	1.54	1.54	1.16	1.16	0.85	129.6	97.2	97.2	71.3